

## PRODUCT DESCRIPTION:


General flood lighting, corridor lighting, security lighting, and roof top lighting. Can also be used as a high bay.

## FEATURES:

- Philips Lumileds 3030 LED chips
- Knuckle Mount OR U-Bracket mounting options
- Mercury Free
- No UV
- Flexible, modular design
- Easy Installation
- Daylight Sensor available

## DIMENSIONS:

DIMENSION Inch(mm)

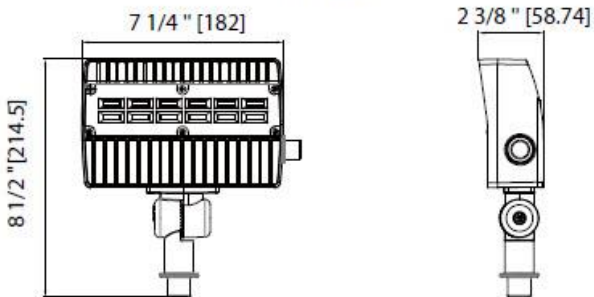

## Knuckle Mount Flood Light 20W Spec

LOD-KFL-20W-50K-LV-V11



**SPECIFICATIONS:**

SPECIFICATION	Details
Model	LOD-KFL-20W-50K-LV-V11
Input Wattage (W)	20W
Lumens Delivered (LM)	2,080LM
Efficacy (LM/W)	104LM/W
CRI	80
Lifespan	50,000 hours
Color Temperature	5,000K
Wattage Equivalent	50W
Dimmable	No
IP Rating	IP65
Beam Angle	120
Input Voltage	AC120-277V
Power Factor	0.9
Housing	Aluminum
Lens	Clear
Mounting	Knuckle Mount or U-Bracket Option
THD	18%
Size	8.44" x 7.16" x 2.31"
Operating Temperature	-20°C to 50°C (-4°F to 122°F)
Certification	DLC, ETL, FCC, CE RoHS, TUV, ISO9001
Environment	Outdoor
Warranty	5 years limited

OPTIONAL ACCESSORIES



10KV SPD  
120-277V



BUTTON STYLE  
PHOTOCELL  
120-277V

INSTALLATION

