


JOB NAME: \_\_\_\_\_

DATE: \_\_\_\_\_

TYPE: \_\_\_\_\_

**DIMENSIONS:**

47.8"(L) x 23.82"(H) x 1.69"(D)

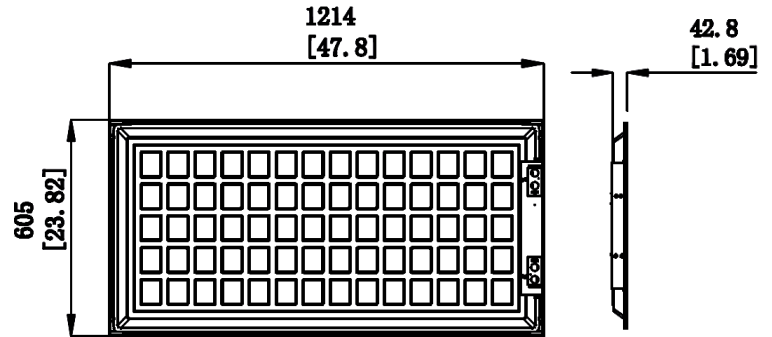

- LPNG-2X4-5KLM-50K-D
- LPNG-2X4-5KLM-40K-D
- LPNG-2X4-5KLM-35K-D
- LPNG-2X4-5KLM-27K-D

**LED BLACKLIT PANEL LIGHT, 100~277 VAC**

Ideal for hotel, offices, retail outlets, restaurant, parking garages, storage room, conference room, education facilities and more.

**ELECTRICAL SPECIFICATIONS:**

- Voltage: 100-277VAC, 50/60Hz
- Wattage: 50W
- Current: 1250mA
- Power factor: >0.90
- Efficacy: 90~110LM/W
- THD: <20%

**HOUSING SPECIFICATIONS:**

- External driver mounted on top
- PMMA Light Guided Panel (LGP) does not turn yellow.
- Earthquake hooks and suspension hooks pre-installed
- Operating temperature: -68°F ~ 104°F
- Lifespan: 50,000 Hrs.

**CERTIFICATIONS:UL,DLC**



MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
LPNG-2X4-5KLM-50K-D	50W	100~277VAC	5500LM	5000K
LPNG-2X4-5KLM-40K-D	50W	100~277VAC	5500LM	4000K
LPNG-2X4-5KLM-35K-D	50W	100~277VAC	5250LM	3500K
LPNG-2X4-5KLM-27K-D	50W	100~277VAC	4500LM	2700K

**LIGHTING SPECIFICATIONS:**

- Dimming: 0~10V dimmable
- Total lumens: 550LM/5250LM/4500LM
- Color temperature: 5000K/4000K/3500K/2700K
- Color rendering index: >80
- Soft and wide light emitting
- No infrared rays, no ultraviolet radiation, no thermal effect
- No flickering, no humming, no RF interference

**WARRANTY: 5 years**

