




**DIMENSIONS:**

9-1/8"(W) x 5-1/4"(H) x 5-3/8"(D)

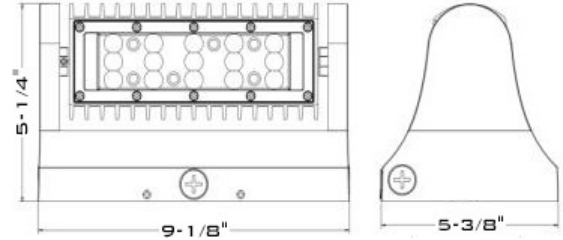

## LW360-40W-50K LW360-40W-30K

### LW360 LED WALL PACK

Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas.

**ELECTRICAL SPECIFICATIONS:**

- Input Wattage: 40W
- Input Voltage: 120-277VAC 50/60Hz
- Other wattages: 60W, 80W, 25W
- Power factor: >0.9
- Efficacy: 125LM/W~130LM/W

**HOUSING SPECIFICATIONS:**

- Aluminum with (Black) powder coat finish
- Operating temperature: -4°F ~ 104°F
- Lifespan: 50000 Hrs.
- IP rating: IP65, Wet Locations
- LED panel swivels 180° each direction

**CERTIFICATIONS: UL**



MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
LW360-40W-50K	40W	120~277V AC	5700LM	5000K
LW360-40W-30K	40W	120~277V AC	5700LM	3000K

**LIGHTING SPECIFICATIONS:**

- LED type/brand: CREE MHB-B
- Total lumens: 3125LM and 3250LM
- Color temperature: 3000K and 5000K
- Color rendering index: >70
- Beam angle: 60°

**WARRANTY: 5 years**



## LW360-40W-50K

## LW360-40W-30K

### LW360 LED WALL PACK


#### CERTIFICATIONS: UL



MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
LW360-40W-50K	40W	120~277V AC	5700LM	5000K
LW360-40W-30K	40W	120~277V AC	5700LM	3000K

#### PHOTOMETRICS:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 129.66 lm/W			
MODEL		Imax (cd)	3900	S/MH (C0/180)	0.85
NOMINAL POWER(W)	25	LOR (%)	100.0	S/MH (C90/270)	0.76
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	3280.3	$\eta$ UP, DN (C0-180)	0.1, 55.6
NOMINAL FLUX (lm)	3280.33	CIE CLASS	DIRECT	$\eta$ UP, DN (C180-360)	0.1, 44.1
LAMPS INSIDE	1	$\eta$ up (%)	0.3	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	120.0	$\eta$ down (%)	99.7	CIBSE SHR MAX	0.60

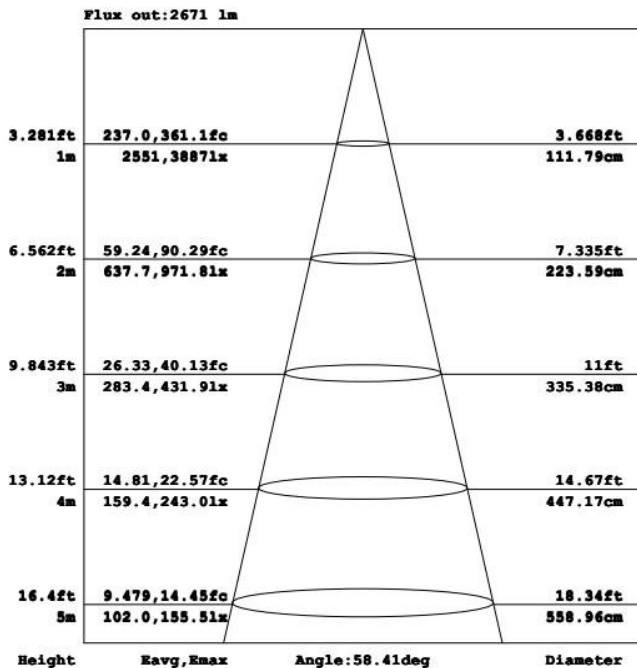

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

