

LWAX SERIES Outdoor Lighting

LWAX-SM-12W-30K-WH
LWAX-SM-12W-50K-WH

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!




Ideal for general site lighting, alleys, loading docks, doorway, pathway, and parking areas. Great for use with motion sensors or another instant on/off controls.

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

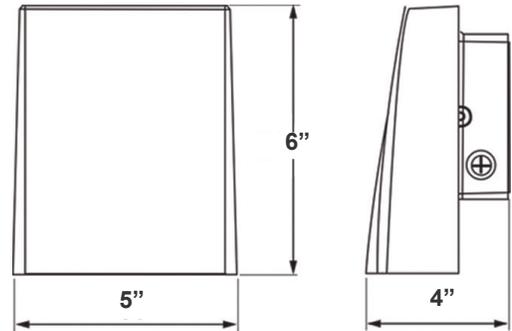

5" (W) x 6" (H) x 4" (D)

Features

- High Light Transmittance, Anti-UV and Fire Resistant PC Lens
- Four 1/2" Knockouts: 1 Top, 1 on Each Side, 1 Back
- Die-Cast Aluminum With Powder Coat Finish (Dark Bronze)
- 7-Year Warranty

Technical Specifications

Electrical:

- Voltage: 120-277VAC 60Hz
- Wattage: 12W
- Power Factor: >0.95
- Efficacy: 125 LPW

Mechanical:

- Die-Cast Aluminum With Powder Coat Finish
- High Light Transmittance, Anti-UV and Fire Resistant Shatterproof PC Lens
- Light Head Can Be Adjusted From 0° to 90°
- Can Be Installed Facing Up (As An Uplight)
- Full Cutoff, Dark Sky Compliant
- Four 1/2" Knockouts: 1 Top, 1 on Each Side, 1 Back
- Operating Temperature: -4°F -104°F
- Wet Location
- 7-Year Warranty
- IP65

Lighting:

- Dimming: 0~10V Dimmable
- Multi CCT and Power (Switches are inside fixture)
- The Type II Distribution is Used For Wide Walkways, On Ramps and Entrance Roadways, As Well As Other Long, Narrow Lighting
- Total Lumens: 1500LM
- Color Temperatures: 3000K/ 4000K/ 5000K
- Color Rendering Index: CRI ≥ 80
- Beam angle: 80° x 100°
- Rated life: 70,000 Hrs

Applications:

- General site Lighting
- Alleys
- Loading docks
- Doorways
- Pathways
- Parking areas

Other Models:



- 12W | 1500LM | LWAX-SM-12W-30K
- 12W | 1500LM | LWAX-SM-12W-40K
- 12W | 1500LM | LWAX-SM-12W-50K
- 30W | 3900LM | LWAX-MD-30W-30K
- 30W | 3900LM | LWAX-MD-30W-40K
- 30W | 3900LM | LWAX-MD-30W-50K




Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com |



Photometrics: LWAX-SM-12W-WH



BUD Rating: B1-U2-G0

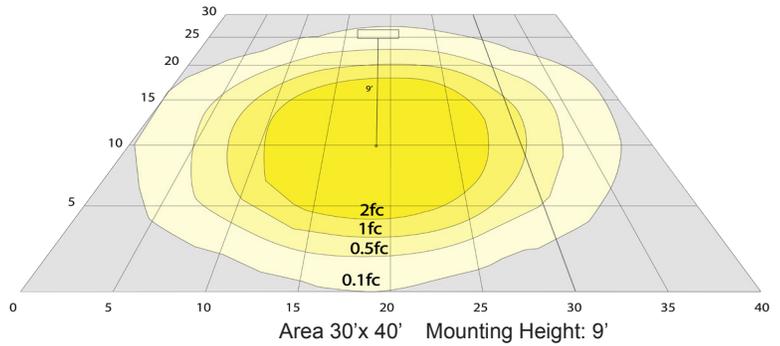

Other Views:



Side View



Front View



Back View

Performance Table: LWAX-SM-12W-WH

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LWAX-SM-12W-30K-WH	12W	120~277V	1500LM	3000K	B1-U2-G0	125
LWAX-SM-12W-50K-WH	12W	120~277V	1500LM	5000K	B1-U2-G0	125

Sample Ordering

Model **Size** **Wattage** **Color Temp.** **House**
 LWAX - SM - 12W - - WH
30K = 3000K
50K = 5000K

Accessories:

LWA-SH1 = SHROUD (Can be painted)

Factory-Installed Options:

Blank = No Option For Accessories
 OPT-EM-FM10D = EXTERNAL EMERGENCY BACKUP BATTERY
 OPT-SEN-3MRLV-5 = PROGRAMMABLE MICROWAVE BI-LEVEL
 OPT-CLR-85 = COLOR PAINT
 OPT-PC-B = BUTTON
 OPT-TRS-T120 = TAMPER RESISTANT SCREW
 WEC-8RC = OPTIONAL REMOTE

ACCESSORIES:



LWA-SH1
(Can be painted)

FACTORY-INSTALLED OPTIONS:



OPT-EM-FM10D
(Shown with EM/Sensor extended box, can be painted)



OPT-PC-B



OPT-SEN-3MRLV-5



WEC-8RC

Example:

- LWAX-SM-12W-50K-WH (FOR LWAX 12W 5000K FIXTURE 120-277V)
- LWAX-SM-12W-50K-WH LWA-SH1 (FOR LWAX 12W 5000K FIXTURE 120-277V) (SHROUD)
- LWAX-SM-12W-50K-WH LWA-SH1 OPT-EM-FM10D (FOR LWAX 12W 5000K FIXTURE 120-277V) (SHROUD) (EXTERNAL EMERGENCY BACKUP BATTERY)

