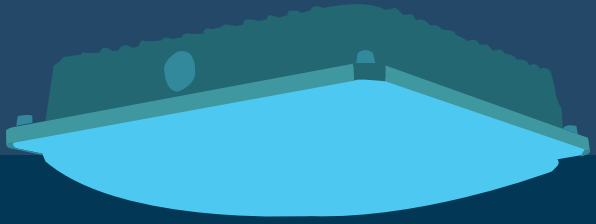

LIRON LIGHTING
Proudly Designed and Made for America

LED SQUARE CANOPY

BATTERY BACKUP | WET LOCATION | LISTED | DLC | 5 YEARS WARRANTY

SPECIFICATION FEATURE:

SEALED DIE-CASTING PROFILE FOR INDOOR AND OUTDOOR APPLICATIONS

LUMEN OUTPUT FOR 40 WATT IS 5,000
LUMEN OUTPUT FOR 27 WATT IS 3.600

INCREASES ENERGY SAVING WITH BI-LEVEL PIR SENSOR

WIDELY USED FOR OUTDOOR LOWER CEILING PORCH, HALLWAY, PAKING GARAGE AND OTHER GENERAL COMMERCIAL LIGHTING PURPOSE

RUGGED DIE-CAST ALUMINUM HOUSING

EXTERNAL MOTION SENSOR AND BATTERY BACKUP OPTION

27 WATT

INPUT VOLTAGE	110-277VAC
CRI	> 75
LUMEN PER WATT	> 133 LM/W
AVAILABLE CCT	4000K,5000K
LIFE SPAN	50,0000 HOURS
OPERATION TYPE	-40F ~ 104F
BEAM ANGLE	120
MOUNTING OPTIONS	SURFACE MOUNT, PENDENT

40 WATT

INPUT VOLTAGE	110-277VAC
CRI	> 75
LUMEN PER WATT	> 125 LM/W
AVAILABLE CCT	4000K,5000K
LIFE SPAN	50,0000 HOURS
OPERATION TYPE	-40F ~ 104F
BEAM ANGLE	120
MOUNTING OPTIONS	SURFACE MOUNT, PENDENT

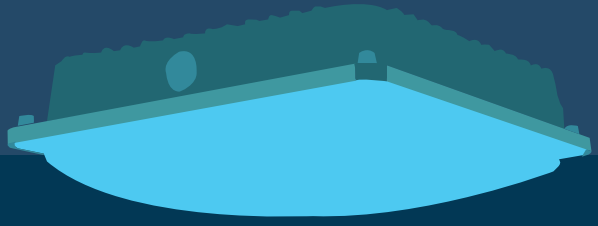

LIRON LIGHTING
Proudly Designed and Made for America

LED SQUARE CANOPY

ORDERING OPTIONS:

EXAMPLE : LEDCNP 40W 50K 277V

40W - 27W

LEDRCNP	40W	50K	277V	-[BLANK]	-[BLANK]
SERIES LEDCNP	RATED WATTAGE 45W 45 WATT 27W 27 WATT	COLOR TEMP 50K 5000KELVIN	INPUT VOLTAGE BLANK 110 - 277 VAC	FINISHING BLANK DARK BRONZE WH WHITE	OPTIONS BLANK - WITHOUT SENSOR M - WITH SENSOR EB - EMERGENCY BATTERY

DIMENSIONS:

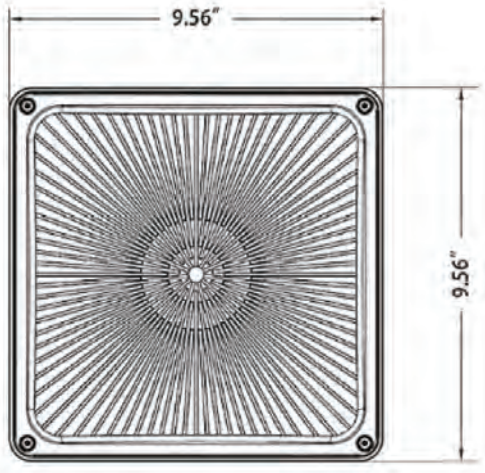

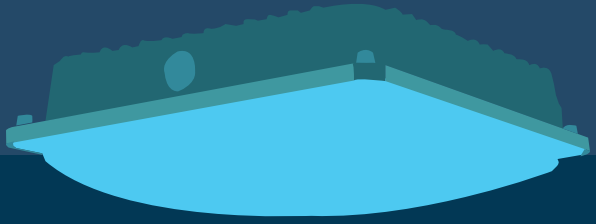

LIRON LIGHTING
Proudly Designed and Made for America

LED SQUARE CANOPY

PHOTOMETRIC:

Luminous Intensity Distribution Curve

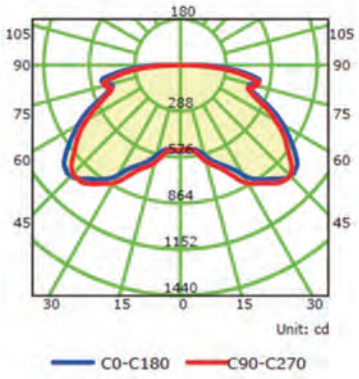

Illuminance at a Distance



INSTALLATION:

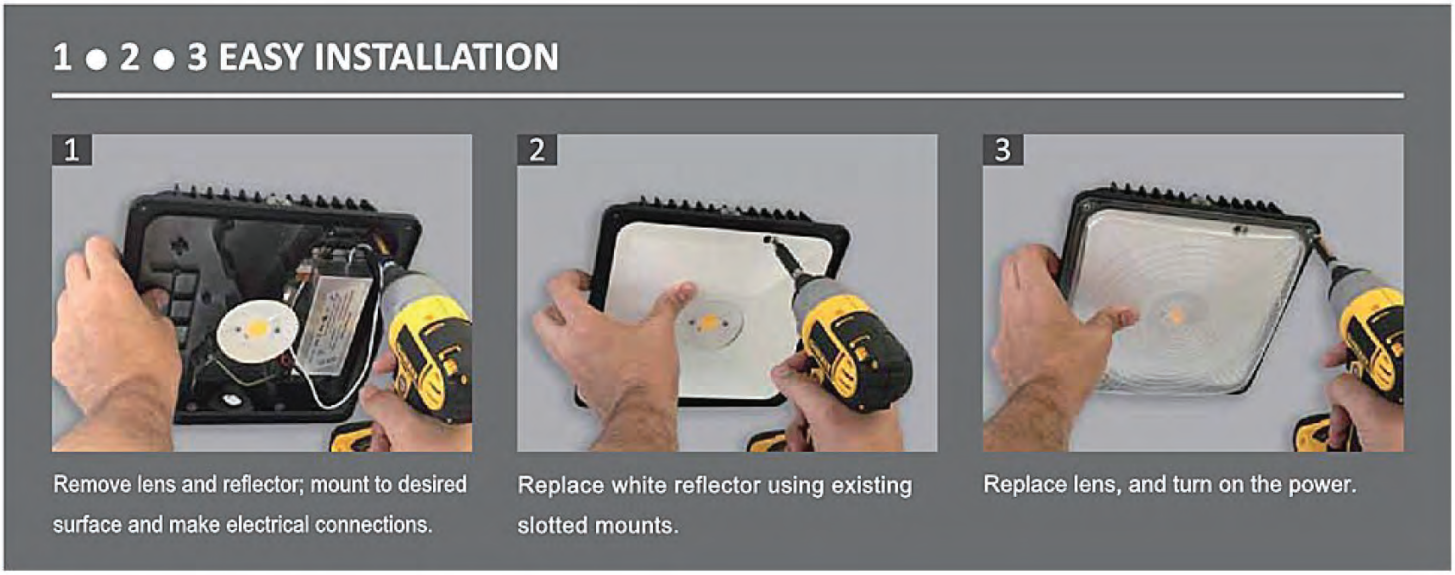

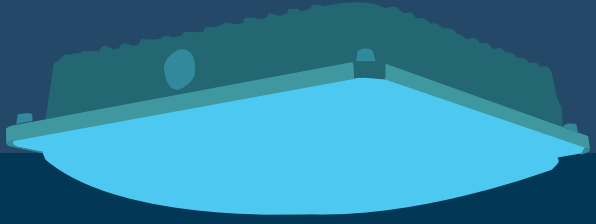

LIRON LIGHTING
Proudly Designed and Made for America

LED SQUARE CANOPY

ACCESSORY OPTIONS:

3/4INCH THREADED HOLE
support pendant mounting,wires coming out from the back for easier wire connections.

EMERGENCY BATTERY
900lm，90min

1/2 INCH THREADED HOLE
Support wires coming out from the hole for easier wire connections. Optional PIR sensor allows for security and energy saving.

MOUNTING BRACKIT
Suitable for J-BOX mounting, and easy for installation.

HOUSING
One piece die cast housing better waterproofing ,suitable for both indoor and outdoor application.

LENS
Clear and frosted lens optional for different applications.