

# MLE100-24DC

## Electronic Triac Dimmable

Outdoor Black Powder Coated Steel Enclosure


Single Circuit: **24VDC**

Total Wattage: **100W max**

Input Voltage: **100-277V 50/60Hz**



Conforms to UL STD. 8750  
Certified to CSA  
STD. C22.2 No 250.13  
model MLE100-24DC

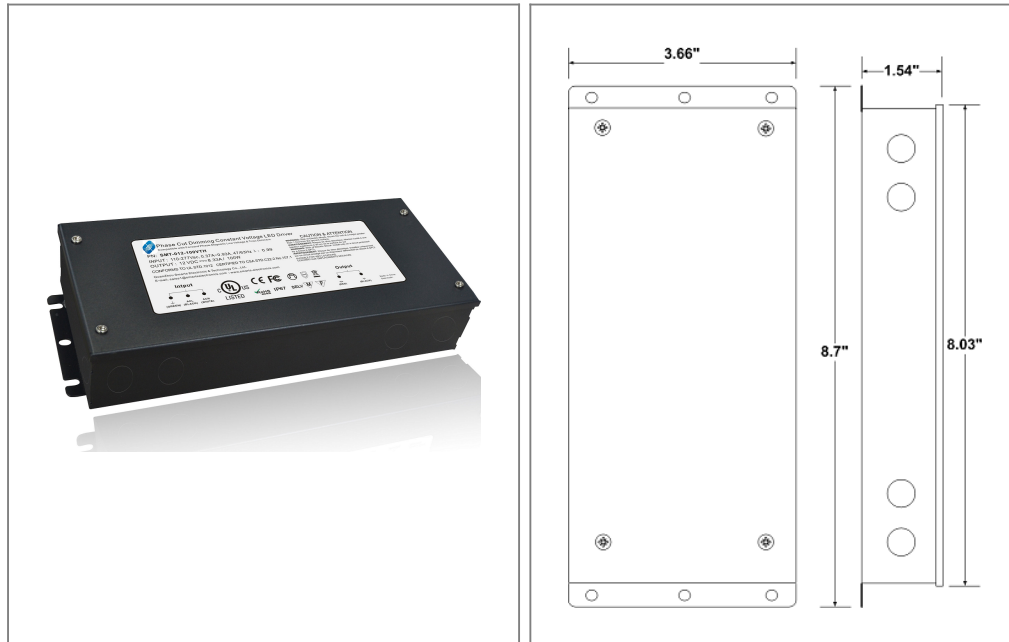

### Transformer

PWM output. Dimmable with any ELV, MLV, CL, forward or reverse phase.

Input leads are 18AWG 600V

Output leads are 16AWG 300V

Leads max. operational temperature is 105°C

### Housing

The actual transformer 100W is encapsulated in the enclosure

The enclosure is Black Powder Coated Steel, with built-in class 2 wiring compartment, dry and damp location rated

Wiring compartment has 6 knockouts sizes for 3/8 inch screw cable connectors

Enclosure Temperature does not exceed 70°C at 45°C ambient and fully loaded

Dimensions (inch): H = 7.8, W = 3.66, D = 1.6

Weight (LBs): 0.3

### Electrical Parameters

Input Voltage: **100-277V 50/60Hz**

Max. input current at full load: **1.5A**

Output voltage without load: **24.1VDC**

Output voltage fully loaded: **24VDC**


Max. Total Wattage: **100W**

Max. Output Current: **4.1A**

Efficiency: **90%**

Load regulation: **1%**

Ripple: **5%**

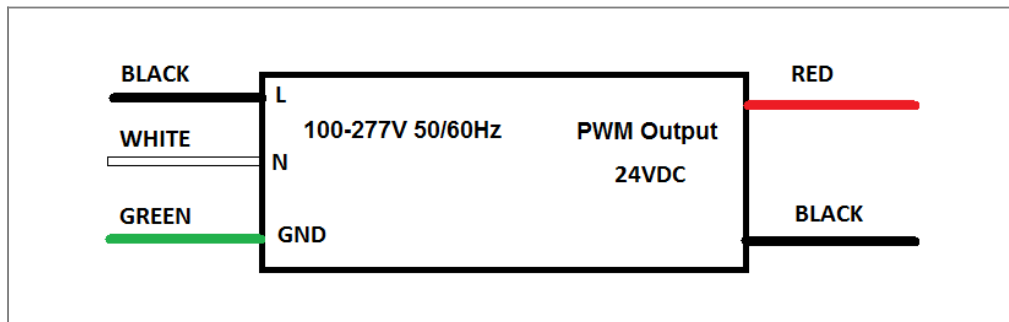

Mailing Address: 6925 Eton Ave. Canoga Park, CA 91303 Tech support: Arik Nirenberg phone: 818-904-3309 cellphone: 818-269-4091  
Fax: 818 904 3327 info@emcod.com techsupport@emcod.com