

DIRECT/INDIRECT 1'x4' PENDANT
MLFP SERIES



PRODUCT DESCRIPTION:


The Direct/Indirect 1x4 Pendant is a unique product offering which provides a 70:30 split of light between the direct surfaces below and the ambient area above the fixture. The fixture provides both functional light and a design statement to any space where it is utilized. The unique design showcases a nearly transparent luminaire when off and excellent uniformity and efficiency when on. The Direct/Indirect 1x4 Pendant is a commercial pendant lighting fixture utilizing an advanced LED optical system to achieve superior performance.

FEATURES:

- Standard 0-10V dimming
- 5 year limited warranty
- CRI: ≥80
- Light distribution 70% / 30%
- Transparent lens appearance on clear lens models
- Standard white finish
- 8 foot suspension cables included

| MODEL SELECTION | | | | Typical order example: MLFP14DI3640ICL | | |
|------------------|-----------|---------------------|---------|--|--------------------|---------------------------|
| MLFP | 14 | DI | 40 | | I | |
| FAMILY | SIZE | DIRECT/INDIRECT | WATTAGE | CCT | TYPE OF LIGHT | LENS OPTION |
| MLFP= Flat Panel | 14= 1'X4' | DI= Direct/Indirect | 40= 40W | 35= 3500K 40= 4000K | I= Indirect/Direct | BLANK= White CL= Clear |

DIMENSIONS:

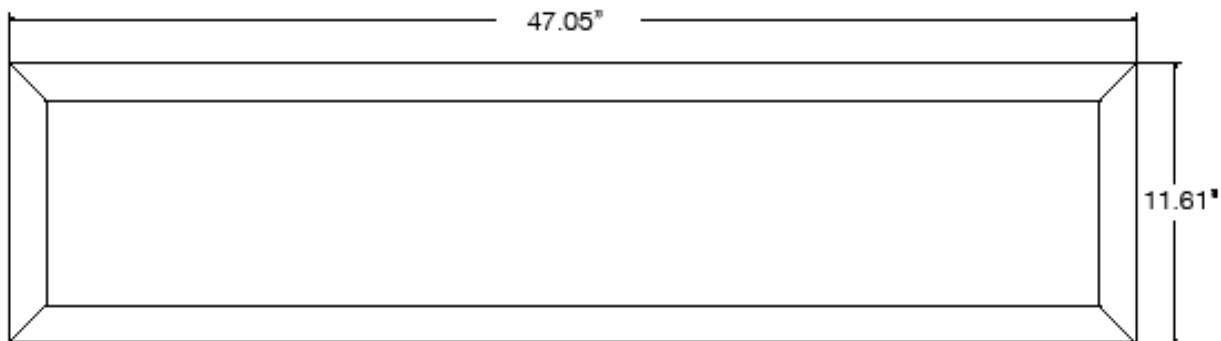

SPECIFICATIONS:

| | | MLFP14DI36XXI | MLFP14DI36XXICL |
|---------------------|-----------------------|---------------------------------------|-----------------|
| ITEM | SPECIFICATION | DETAILS | DETAILS |
| GENERAL PERFORMANCE | Power Consumption (W) | 39.4W | 39.3W |
| | Lumens Delivered (lm) | 4393 | 4721 |
| | Efficacy (lm/W) | 111 | 120 |
| | CRI | ≥80 | |
| | Color Temperature (K) | 3000, 3500, 4000 | |
| | L70 Lifetime (hours) | 50,000 | |
| | Color Consistency | Proprietary binning for uniform color | |
| ELECTRICAL | Power Factor | ≥0.9 | |
| | Input Voltage | 120-277V | |
| | Compatible Dimmers | 0-10V Dimming | |
| PHYSICAL | Weight | 4.5 lbs | |
| | Mounting | Pendant | |
| | Operating Temperature | -4°F to 104°F | |
| | Humidity | 10-80% RH, non-condensing | |
| QUALIFICATION | Qualification | FCC, cETLus, DLC 4.2 Standard | |
| | Material Usage | RoHS compliant; no mercury | |
| | Environment | Indoor | |
| | Warranty | 5 years | |

ORDERING TABLE:

| ORDER CODE | MODEL NUMBER | WATTAGE | CCT | TYPE OF LIGHT | LENS TYPE |
|------------|-----------------|---------|-------|-----------------|-----------|
| 14098821 | MLFP14DI3635I | 36W | 3500K | INDIRECT/DIRECT | WHITE |
| 14098822 | MLFP14DI3640ICL | 36W | 4000K | INDIRECT/DIRECT | CLEAR |