



LED Retrofit kit

30W-150W



Applications

Directional lamps for industrial and commercial fixture applications:
For use in wall pack, canopy, shoe box, or cobra head fixtures.



50,000 hours
Lifespan

Brightness solution for professional lighting

80% Energy saving over HID lamp

LED Retrofit kit

30W/40W/60W/80W/100W/120W/150W

Features

- Pure aluminum through hole and air convection design to speed up heat dissipation .
- Coating surface treatment enhances heat dissipation.
- 340 degree wide-angle lamp holder.
- 150lm/W High photosynthetic efficiency
- Emits no UV light / contains no mercury(Hg).
- Widely replace HID .
- Dust and fire-proof,IP64.



Beam angle




Light down




No fan inside
(30-100W)



Base 340°
Rotatable

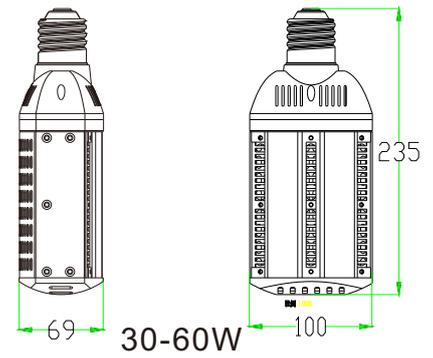


30-60W

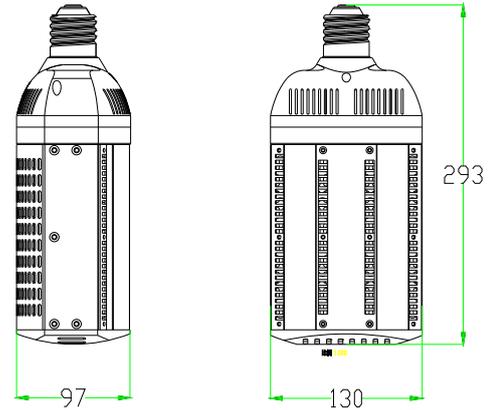

80-150W

Parameter

Model	Power	Lumens (LM)	Voltage	Luminous Eff.	CCT(K)	Dim. (E39)	CRI	SMD	Weight	IP Rate
NS-ARK30W-01C	30W	4500LM ±200LM	AC100-277V	150lm/W	2500-7000K	235x100x69mm 9.25x3.94x2.72in	>80	2835	700g	IP64
NS-ARK40W-01C	40W	6000LM ±200LM	AC100-277V	150lm/W	2500-7000K	235x100x69mm 9.25x3.94x2.72in	>80	2835	700g	IP64
NS-ARK60W-01C	60W	8600LM ±200LM	AC100-277V	150lm/W	2500-7000K	235x100x69mm 9.25x3.94x2.72in	>80	2835	700g	IP64
NS-ARK80W-01C	80W	11600LM ±200LM	AC100-277V	150lm/W	2500-7000K	293x130x97mm 11.54x5.12x3.82in	>80	2835	1600g	IP64
NS-ARK100W-01C	100W	15000LM ±200LM	AC100-277V	150lm/W	2500-7000K	293x130x97mm 11.54x5.12x3.82in	>80	2835	1600g	IP64
NS-ARK120W-01C	120W	18000LM ±200LM	AC100-277V	150lm/W	2500-7000K	293x130x97mm 11.54x5.12x3.82in	>80	2835	1600g	IP64
NS-ARK150W-01C	150W	22000LM ±200LM	AC100-277V	150lm/W	2500-7000K	293x130x97mm 11.54x5.12x3.82in	>80	2835	1600g	IP64



CFL




(HPS/HID/MH)

30W
40W
60W
80W
100W
120W
150W



65W	100W
85W	150W
125W	200W
165W	250W
200W	320W
240W	450W
300W	600W

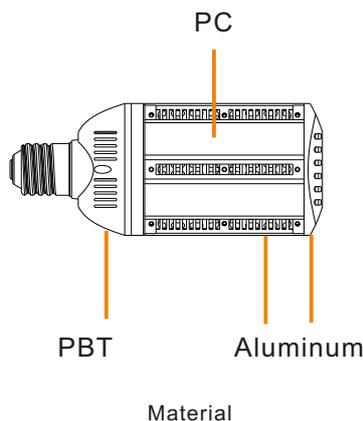

Material

