


RHLED LED MR16 Remote Head Indoor



Project:	
Type:	
Catalog #:	

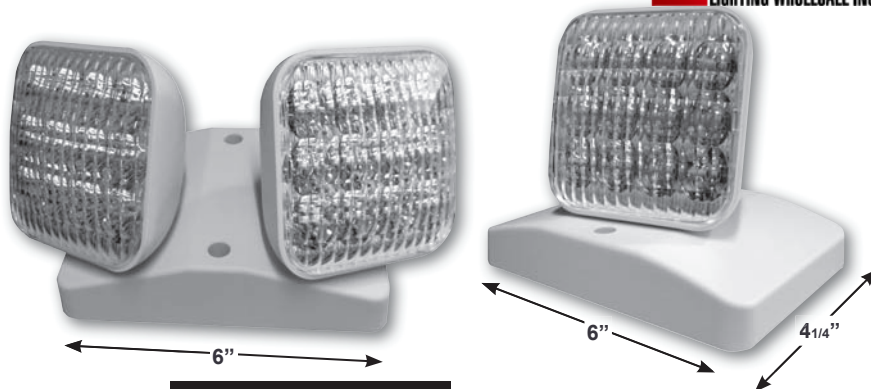

ILLUMINATION

- Long lasting, efficient ultra-bright white LED lamp heads.
- High-performance chrome-plated metalized reflector and plastic lens with 8 or 12 LED's in each lamp head on standard and HL models. LP models with unique all inclusive lamp, reflector and lens assembly.
- Adjustable LED lamp heads increases center-to-center spacing.

ELECTRICAL

- Powered from low voltage power source with low voltage wiring (not provided).

MOUNTING

- Universal mounting base mounts to single-gang switch box.
- Distance of maximum run is determined by system voltage, wire gauge and total maximum wattage on the run.
- Suitable for wall or ceiling mount.

HOUSING

- Indoor application remote heads are injection-molded, engineering-grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.

WARRANTY/LISTING

- Five year warranty on electronics and housing.
- UL listed with approved Best Lighting Products.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

FIXTURE COMPATIBILITY CHART

Reference individual unit equipment specification sheets for remote load capacity availability.

Model Type	Standard and HL	LP
LEDCXTEU	X	
CLPU	X	
CKXTEU	X	
LEDR5HO	X	X
LEDRX-5HO	X	X
LEDTFX-2	X	
E-1	X	X
CEU	X	X
R-5HO	X	
R-16HO	X	
DXR	X	
TFX-2	X	
NYDXR	X	
CXTEU HO	X	

ORDERING INFORMATION

Sample Part Number: **RHLED-1-MV**

Model	No. of Heads	Color	Housing	Lamp type ⁽¹⁾	Voltage	Options
RHLED	1 Single Head	Blank White	Blank Thermoplastic	Blank 8 LEDs 1W ⁽²⁾	MV For use with 3.6V, 6V, 9.6V or 12V batteries.	Blank For standard non-self-diagnostic fixtures
	2 Double Head	B Black		HL 12 LEDs 1.5W ⁽²⁾ LP 1 LED 1W ⁽³⁾	3.6 For use with 3.6V batteries	SDT For use with fixtures with a self-diagnostic option

Notes:

1. Wattage rating stated per head.
2. Not available with 3.6 option.
3. Not available with MV option.