
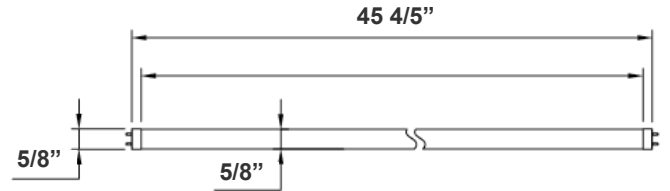


T5 SERIES COMMERCIAL INDOOR LIGHTING

T5-EZ6-GS-4FT-24W-40K-F
T5-EZ6-GS-4FT-24W-50K-F

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: _____
Project Name: _____
Note: _____ | Type: _____

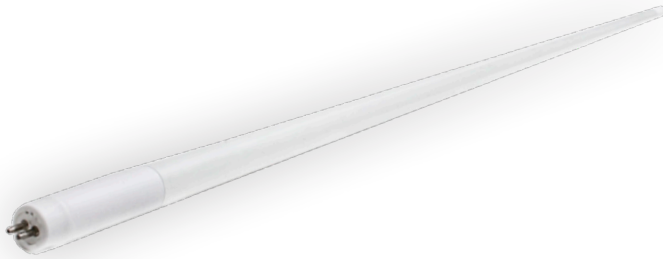

45 4/5" (L) X 5/8" (D)

Crystal Glass T5 Tube switches from fluorescent tubes to LED, giving more cost efficiency by providing the same amount of lumen output with less energy consumption. The LED tube offers a soft and bright light distribution.

Features

- Type A + B (Dual UL)
- Type A: With Existing Ballast - UL No. E366061
- Type B: Ballast Override (AC Direct), Connect One End or Both Ends (Dual Function) - UL No. E342884
- 5-Year Warranty
- Frosted Lens

Technical Specifications

Electrical:

- Voltage: 120-277V; 50/60Hz AC
- Power Factor: >0.90
- THD: <20%
- Wattage: 24W
- Efficacy: 129 LPW

Mechanical:

- Base Type: G5 base (bi-pin with 5 mm spacing)
- Glass Tube: Frosted
- Ambient Operating Temperature: -13°F to 113°F
- Rated life: 50,000 hrs
- IP Rating: IP20 (Indoor)

Lighting:

- Dimming: Non Dimmable
- Total Lumens: 3100LM
- Color Temperatures: 4000K/5000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 120°
- Rated life: 50,000 hrs

Applications:

- Direct Fit 4 T5 LED tubes do not burn out easily and provide bright and even lighting to schools, office spaces, retail stores and storage rooms.





Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com |




WG-02082022

Photometrics: T5-EZ6-GS-4FT-24W-F



BUG Rating: B1-U4-G2

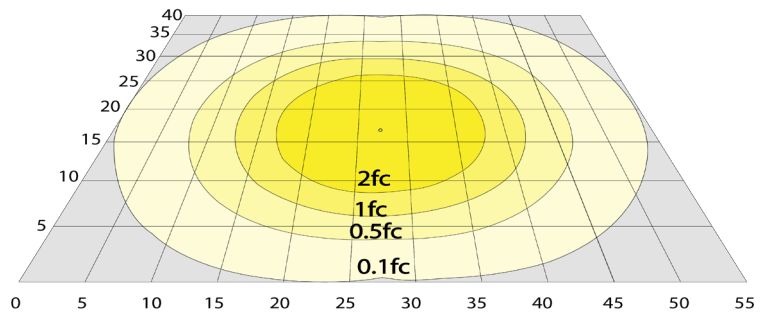


Area 40'x 55' Mounting Height: 9'

Other Views:



Side View



Front View



Socket View

Performance Table: T5-EZ6-GS-4FT-24W-F

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
T5-EZ6-GS-4FT-24W-40K-F	24W	120-277V	3100LM	4000K	B1-U4-G2	129
T5-EZ6-GS-4FT-24W-50K-F	24W	120-277V	3100LM	5000K	B1-U4-G2	

Sample Ordering

Model	Material	Size	Watt	Color Temp.	Lens Type
T8	EZ6	GS	4FT	24W	F

40K = 4000K
50K = 5000K


Example:

1. T5-EZ6-GS-4FT-24W-40K-F

(FOR 24W 4000K T8 2FT TUBE LAMP 120-277V)

WIRING DIAGRAM:


TYPE A (With Existing Ballast):

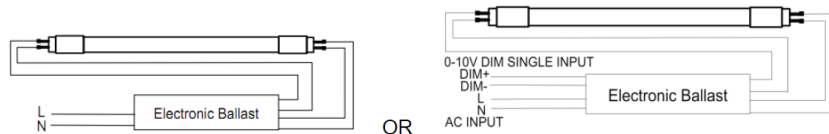

TYPE B (Ballast Override/AC Direct):

Note: The tube can work with double-end and sigle-end power input

Case 1 Without dimming



Voltage Input: AC120-277V 50/60Hz

Case 2 With dimming

