



CLEAR



FROSTED

T8-4FT-DIM-18W-35K-C T8-4FT-DIM-18W-35K-F
T8-4FT-DIM-18W-40K-C T8-4FT-DIM-18W-40K-F
T8-4FT-DIM-18W-50K-C T8-4FT-DIM-18W-50K-F

4FT. T8 LED GLASS TUBE LAMPS

Ideal for offices, retail stores, showrooms and residential applications. Especially suited for areas where accessing the fixture is challenging


ELECTRICAL SPECIFICATIONS:

- Voltage: 90~140VAC
- Wattage: 18W
- Power factor: >0.90
- Efficacy: 105~119LM/W

HOUSING SPECIFICATIONS:


- Rated for use in open fixtures only. Not for use in enclosed fixtures
- Requires no ballast. Existing ballast must be bypassed and sockets wired directly to line voltage
- Base: Fits standard T8 or T12 sockets (G13)
- Operating temperature: 14°F ~ 80°F
- Lifespan: 50,000 Hrs.

CERTIFICATIONS: UL, NSF

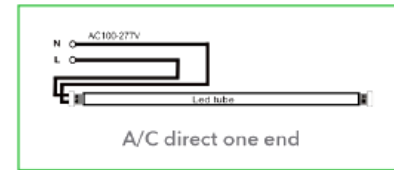

Installation Instructions

Powered from one end
(Retrofit Application)

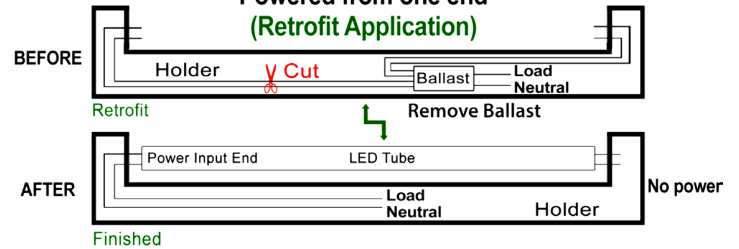

MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP	FINISH
T8-4FT-DIM-18W-35K-C	18W	90~140VAC	1900LM	3500K	Clear
T8-4FT-DIM-18W-40K-C	18W	90~140VAC	2150LM	4000K	Clear
T8-4FT-DIM-18W-50K-C	18W	90~140VAC	2150LM	5000K	Clear
T8-4FT-DIM-18W-35K-F	18W	90~140VAC	1900LM	3500K	Frosted
T8-4FT-DIM-18W-40K-F	18W	90~140VAC	2150LM	4000K	Frosted
T8-4FT-DIM-18W-50K-F	18W	90~140VAC	2150LM	5000K	Frosted

LIGHTING SPECIFICATIONS:

- Dimming: dimmable
- T8 LED lamp operates A/C Direct (Ballast override)
- Total lumens: 1900LM/2150LM
- Color temperature: 3500K/4000K/5000K
- Beam Angle: 120°

WARRANTY: 5 years

