


PRODUCT DESCRIPTION:

The multi wattage troffer retrofit provides maximum uniform light distribution without pixilation. The fixture is one piece and has an enclosed steel framed bracket. It is designed to upgrade fluorescent light fixtures. It is ideal for commercial and industrial uses. This luminaire was engineered as an energy efficient and eco-friendly alternative to traditional lighting solutions.

FEATURES:

- High quality LED chips with 50,000 hours
- No flicker
- Fully integrated reversible hinge
- Assembly allows for rapid troffer conversion
- Easy installation – no need to remove existing fixture housing

DIMENSIONS:

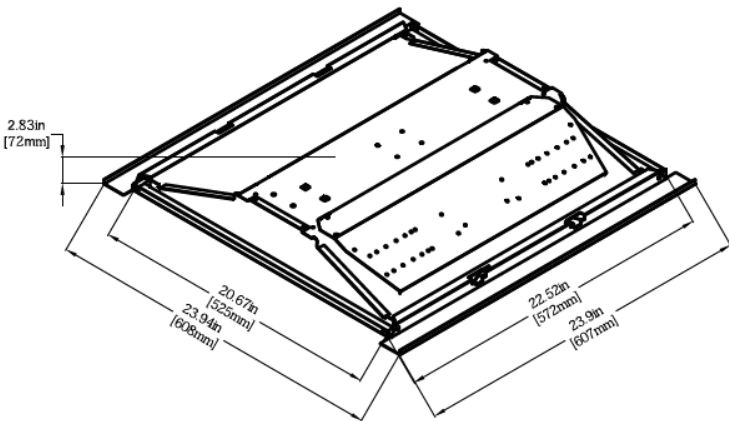

LED 2x2 Multi Wattage Troffer Retrofit Spec

TRK-22-19/D10/40

TRK-22-24/D10/40

TRK-22-29/D10/40



SPECIFICATIONS:

SPECIFICATION	Details		
Model	TRK-22-19/D10/B/40	TRK-22-24/D10/B/40	TRK-22-29/D10/B/40
Input Wattage (W)	19W	24W	29W
Lumens Delivered (LM)	2,402LM	2,600LM	3,738LM
Efficacy (LM/W)	126.4LM/W	127LM/W	128.9LM/W
CRI	80	80	80
Lifespan	50,000 hours		
Color Temperature	4,000K		
Wattage Equivalent	70W		
Dimmable	Yes		
IP Rating	IP40		
Beam Angle	150		
Input Voltage	AC120-277V		
Power Factor	0.9	0.9	0.9
THD	20%	20%	20%
Housing	Aluminum		
Lens	Frosted		
Mounting	Existing Troffer Housing		
Weight (LBS)			
Size	23.94" x 23.9" x 2.83"		
Certification	DLC, UL, FCC, CE, RoHS, TUV		
Operating Temperature	-20°C-50°C		
Environment	Indoor		
Warranty	5 years limited		

