

Project:		Catalog #:		Type:	
Prepared by:		Notes:		Date:	

VTA

LED Vapor Tight Fixture
Selectable CCT and Wattage
2-ft, 4-ft, & 8-ft options •5-yr Warranty




KEY FEATURES


- 2', 4', & 8' configurations available for design flexibility
- ezCCT selectable between 3500K and 5000K, and ezWATT selectable wattage
- All configurations are DLC 5.0 Standard listed
- 130+ LPW provides 40-60% in energy savings vs. fluorescent
- Polymer diffusing lens creates an extremely uniform visual aesthetic and provides targeted uniform illumination
- UL Listed wet location + IP66 rating
- Easy and tamper resistant installation
- Liquid-tight connector included / optional flexible metal conduit adapter available
- 120-277V drivers with 0-10v dimming standard
- NSF listed for ANSI 2 - Food Equipment use



Highlights

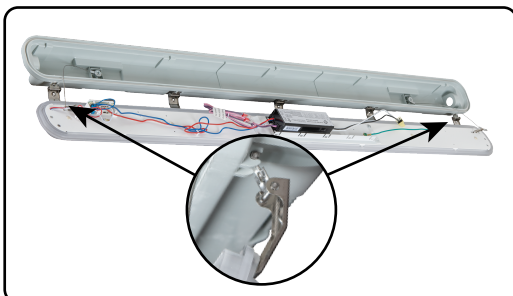


Convenient support latches will keep the top half suspended during installation, to free up hands during mounting and wiring



Surface-mounting clips



Liquid-tight cord bushing



Suspension V-hook brackets (two provided)



CCT & Wattage selectable (3500K or 5000K)

Load Information


Power Factor	0.9
THD	10%
Low Temp Start	-40°C (-40°F)
Max Temp	45°C (113°F)
Item Weight	4.7 lbs

Shipping Information


Profile	Unit Wt.	Unit Qty	Case Wt.	Box Qty.
2-ft profile	TBA	1 item	TBA	4 units
4-ft profile	5.4 lbs	1 item	23 lbs	4 units
4-ft profile	TBA	1 item	TBA	4 units

Dimensions


2-ft models:
VTA2N32SE83550



4-ft models:
VTA4N44SE83550
VTA4N58SE83550

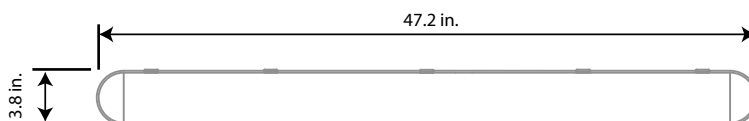

8-ft models:
VTA8N117SE83550

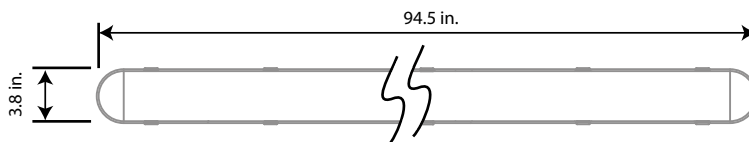

STOCK ORDERING INFORMATION

2-FT Housing Length

2-FT Housing Length

Catalog Logic	Order #	Lumens	Wattage	LPW	Color Temperature	CRI	Voltage	Dimming	Certifications	Pallet Qty
VTA2N32SE83550	90038	3250, 2600, 1950 LM Select	25, 20, 15 W Select	130	3500K & 5000K Selectable	80	120-277 V	0-10v	UL, DLC-Standard	TBA

4-FT Housing Length

4-FT Housing Length

Catalog Logic	Order #	Lumens	Wattage	LPW	Color Temperature	CRI	Voltage	Dimming	Certifications	Pallet Qty
VTA4N44SE83550	90039	4420, 3900, 3250 LM Select	34, 30, 25 W Select	130	3500K & 5000K Selectable	80	120-277 V	0-10v	UL, DLC-Standard	TBA
VTA4N58SE83550	90040	5850, 4940, 4420 LM Select	45, 38, 34 W Select	130	3500K & 5000K Selectable	80	120-277 V	0-10v	UL, DLC-Standard	TBA

8-FT Housing Length

8-FT Housing Length

Catalog Logic	Order #	Lumens	Wattage	LPW	Color Temperature	CRI	Voltage	Dimming	Certifications	Pallet Qty
VTA8N117SE83550	90041	11700, 9750, 8450 LM Select	95, 75, 65 W Select	130	3500K & 5000K Selectable	80	120-277 V	0-10v	UL, DLC-Standard	TBA



ENERGETIC
L I G H T I N G

VTA

CCT&W-Select LED Vapor Tight Fixture
2-ft, 4-ft, & 8-ft options • 5-yr Warranty

NOTES: