

# WLXTE Wet Location LED Exit Sign



Project:	
Type:	
Catalog #:	

## STANDARD



## OPTIONAL



## ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LED.

## ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

## MOUNTING

- Mounting hardware provided for back surface wall mount.

## HOUSING

- 5VA flame retardant, UV-stabilized polycarbonate gray finish.
- High-impact resistant, UV-stabilized polycarbonate clear lens.
- Corrosion-resistant enclosure with engineering grade silicone gasket.
- Top and side K/O's provided for conduit feed applications.
- EZ snap-out chevron directional indicators.


## OPTIONS

- HTR: Optional internal heater for cold temperature applications.
- USA: Substantial transformation assembly in the U.S. complies with "Assembled in the USA" under the Buy American Act.

## WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery pro rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for wet locations (10°C – 40°C).

## DIMENSIONS

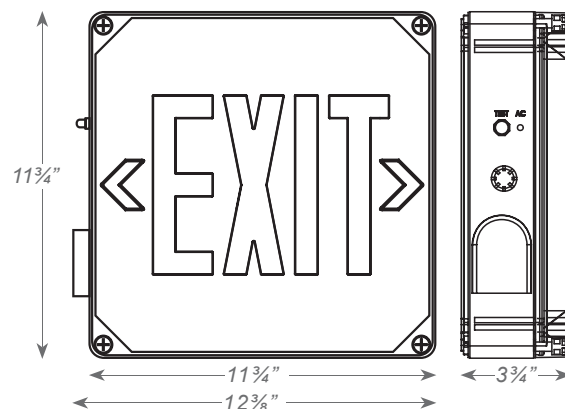

## ORDERING INFORMATION

Sample Part Number: **WLXTE-1-R-EM**

Special voltage & SALIDA face plate options available. Check with your Best Lighting Representative.

MODEL	No. of FACES	LETTER COLOR	BATTERY	OPTIONS
WLXTE	1 Single Face	R Red G Green	Blank AC Only EM Battery Backup	HTR Internal Heater <sup>1</sup> USA Assembled in USA

<sup>1</sup> Available only with EM units.



Project:	
Type:	
Catalog #:	

ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
WLXTE/EM	5.4	5.4	0.045	0.019