

WPD WALL PACK LIGHT

Amber LED Full Cut-off Wall Pack Light for Turtle Safe

Introduction

- ◆ The Amber Wall Pack Light is specifically designed for Turtle Safe compliance, emitting amber light with a wavelength of 590 nanometers. While meeting pedestrians' nighttime lighting requirements, it minimizes ecological disturbance to marine life.
- ◆ The Amber Wall Pack Light matches traditional metal halide wall lights in size, fully covering old stains. A high-quality polycarbonate lens, which works with a high-efficiency light engine to provide superior illumination.
- ◆ Low-impact exterior wall lighting ideal for coastal buildings, farm warehouses, residential exteriors, and environmentally sensitive areas.



Product Specifications

Construction:

- ◆ Rugged die-casting aluminum housing with bronze powder coating for durability. Castings are sealed with integral gaskets to prevent the ingress of external contaminants.

Electrical:

- ◆ Equipped with a 0-10V continuous driver; Min.Dim Level: 0%. The dimming wires are available for connection to a dimmer.
- ◆ Input voltage is 120-277VAC, 50/60Hz.
- ◆ Designed to withstand surges of up to L/N-PE:6kV and L-N:4kV.

Optics:

- ◆ Turtle and wildlife friendly 590nm amber light.

Finish:

- ◆ Standard color is Dark Bronze.



Ambient Temperature:

- ◆ -40° F (-40° C) to 113° F (45° C)

Compliances:

- ◆ cULus listed for wet locations, max ambient temperature rating 45°C

Warranty:

- ◆ 5-year limited warranty.

Ordering Guide

EXAMPLE: XWPD63WSAMBUVDCP

Brand X	Product name WPD	Wattage ¹ XXX	LED Color YYY	Input Voltage AA	Finish ² ZZ	Photocontrol K	Emergency Battery Y
LLWINC	WPD	63WS=63/45/30W Note: WS=Wattages Selectable	AMB=Amber 590nm	UV=120-277VAC	DC=Dark Bronze color WC=White color BC=Black color SC=Silvery color GC=Green color OC=Other color	P=with photocell	Blank=without emergency E=with emergency


Note: 1.63WS=63W, 45W, 30W Selectable, 63W default setting.

2.Finishes in grey text are custom colors. For orders, please contact us in advance.

Performance Data


Model	Wattage	Lumen	LED Color	Input voltage
XWPD63WSAMBUVZZPY	63/45/30W	Max.1,800lm	Amber 590nm	120-277VAC 50/60Hz

Photometrics

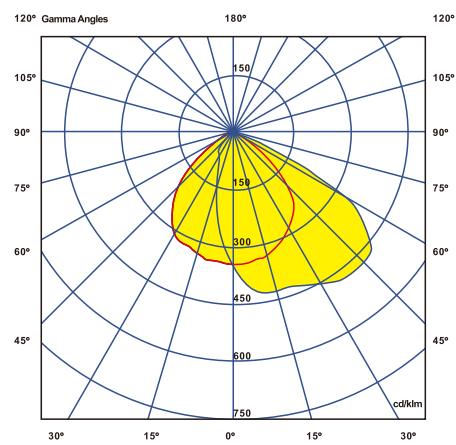


Spectral Chart

Relative Spectrum

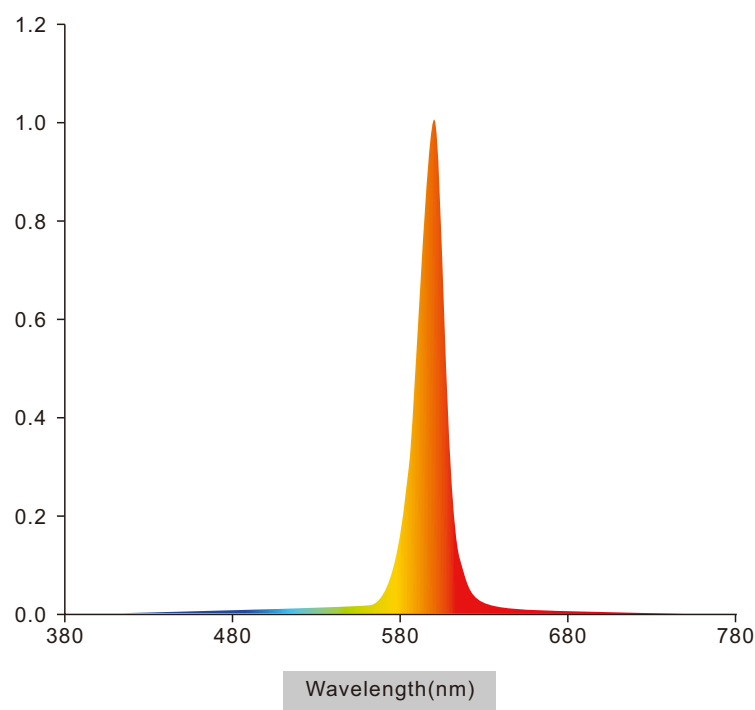

Versatile Selection Capability

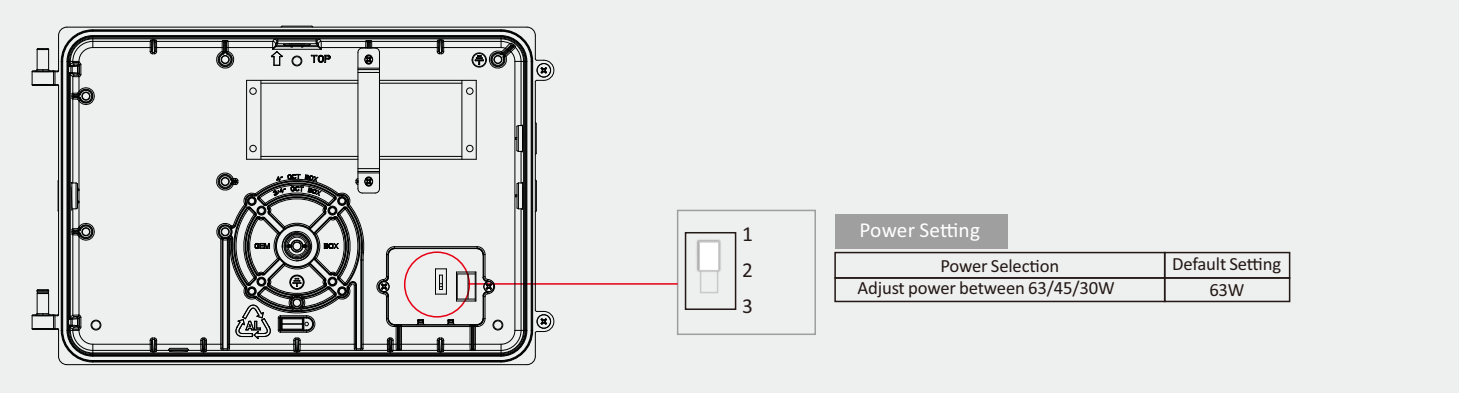

Note: Before Setting Power, loosen the 2 captive screws in the side of front housing, remove the front case set carefully from the back plate.

Accessories

Control Options

Comes as standard

	XPC-B Photocell -With Sunshade Cover
--	---

Emergency Battery Backup

Factory-Installable OR Field-Installable (field-installable purchased separately)


	XEBB31-8WDC Emergency Battery Backup EMX-08300DO-HY -8W/90min, for XWPD, at 120-277VAC
---	---



Electrical Data

Model Series	Wattage(W)	Current (A)			
		Input Voltage (V)			
		120	208	240	277
XWPD63WS	30	0.28	0.16	0.14	0.12
	45	0.42	0.24	0.21	0.18
	63	0.58	0.34	0.29	0.25

Dimensions

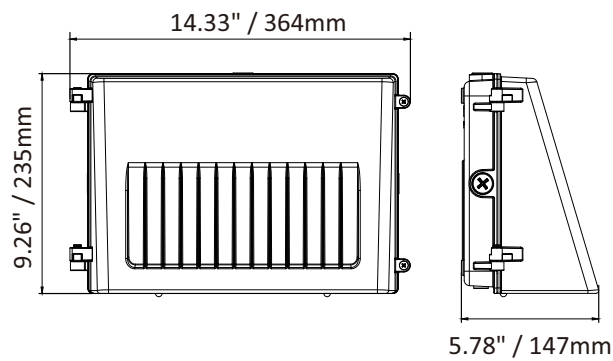

Shipping Information

Model	Carton Size (in)	G.W. (lbs)	Per carton (pcs)	20GP (pcs)	40HQ (pcs)
XWPD63WS	15.75 x 11.42 x 7.17	7.91	1	1,088	2,994

Note:The packaging data can sometimes be outdated or incomplete. For the most reliable information, please reach out to us directly.