



100W

WALL PACK LIGHT

PRODUCT FEATURES:

- ✤ Optical design, greatly improved the light utilization and evenness.
- ✤ High efficiency LED Driver.
- ↔ Cast Aluminum design, better cooling, light quality, LED Tj < 85 °C.
- The 1-10V Dimming typel.
- Photocell Control (Optional).

Additional Information:

- o Power: 100W
- o Input: AC 120-277V
- o CCT: 4000K/5000K
- o Light Source: LUMILEDS
- o Driver: KERHAM POWER

FC (E





CONTRACTOR NOT CONTRACT CONTRACT


The Brighter Choice


The WALL PACK LED Lighting Series can be widely used for Indoor or Outdoor (Wet Location) Excellent for Museums,

5 YEAR

Art Galleries, Shopping Malls, Office Buildings, Walls and many other applications.

ΓFD







Structure Features:

- o Shell Materials: Aluminum & PC
- o Finish: Dark Bronze/White/black
- o Net Weight: 3.32KG (7.3 LBS)
- Product Size: 330mm*267mm*126mm
- Carton Size: 380mm*300mm*180mm






WALL PACK LIGHT

TECHNICAL PARAMETERS:

Туре	WSD-SWP10W27-XXK-Z-Y-G2					
Power	100W	Lighting Angle	89°			
Input Voltage	AC120-277V	LED Brightness Decay	<5%/6000 hrs			
PF	>0.98	Working Life	>75000 hrs			
Driver Efficiency	>90%	Working Temperature	-30 - +45℃			
Luminous Flux	13100 Lm	Storage Temperature	-40 -+80℃			
Color Temperature	4000K/5000K	Protection Level	Wet Location			
CRI	Ra>70	Cable	Input Connect, No Cable			

PHOTOMETRY:

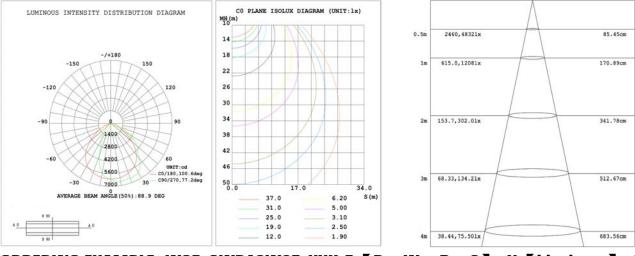

ORDERING EXAMPLE: WSD-SWP10W27-XXK-Z [D, W, B, S] -Y [blank, p] -G2

WSD	10W	SWP	27	ХХК	Z	Ŷ
Company	Power	Product	Voltage	ColorTemp	FINISH	Control
WSD LED INC	10W (100W)	SWP Slim Adjustable Wall Pack	27 AC120-277V	40K (4000K) 50K (5000K) ± 500K	D (Dark Bronze) W (White) B (Black) S (Silvery)	P Photocell