

LED WRAPROUND LIGHT

PRODUCT FEATURES:

- ❖ Optical design, greatly improved the light utilization and evenness.
- ❖ High efficiency LED Driver, voltage AC120-277.
- ❖ Sheet iron design, better cooling, light quality, LED Tj < 85°C.
- ❖ The 0-10V Dimming type is continuous.
- ❖ The product can dim to 10%.



MODEL #	
PROJECT:	
NOTES:	
DATE:	
PREPARED BY:	

Additional Information:

- Power: 40W
- Input: AC 120-277V
- CCT : 3500K/4000K/5000K
- Output: 5372.5 LM
- Light Source: SEOUL
- Driver: SIMON POWER



PRODUCT APPLICATIONS:

The Wraparound LED Lighting Series can be widely used for Indoor Excellent for Offices, Hallways, Multipurpose Rooms , Office Buildings, Conference Rooms,super market, store and many other applications.

Specifications


Wraparound-2FT/4FT
 Length:622MM/1211.8MM(24.5"/47.7")
 Width: 180MM(7.1")
 Depth:71MM(2.8")
 Weight:4.45/7.94 (lbs)

Packaging information

- ❖ **Inside the box:**1235MMX186MMX76MM
48.6"X7.32"X3"
- ❖ **carton:**1250MMX326MMX207MM(A case of four)
49.2"X12.83"X8.15"

Mounting

- ❖ Surface Mounting.



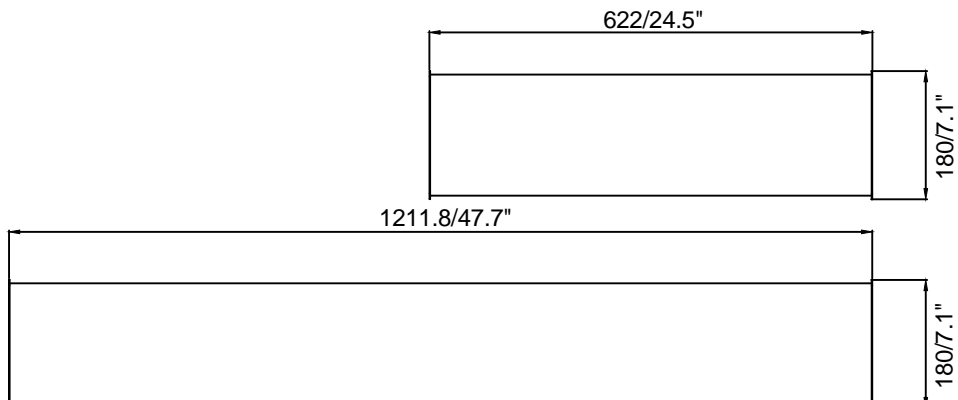


LED WRAPROUND LIGHT

TECHNICAL PARAMETERS:

Type	RP4FT40W-XXK		
Power	40W	Lighting Angle	101°
Input Voltage	AC120-277V	LED Brightness Decay	<5%/6000 hrs
PF	>0.98	Working Life	>75000 hrs
Driver Efficiency	>90%	Working Temperature	-20 - +50°C
Luminous Flux	5372.5 Lm	Storage Temperature	-20 -+50°C
Color Temperature	3500K/4000K/5000K	Protection Level	Dry
CRI	Ra>80	Cable	Input Connect, No Cable

PHOTOMETRY:

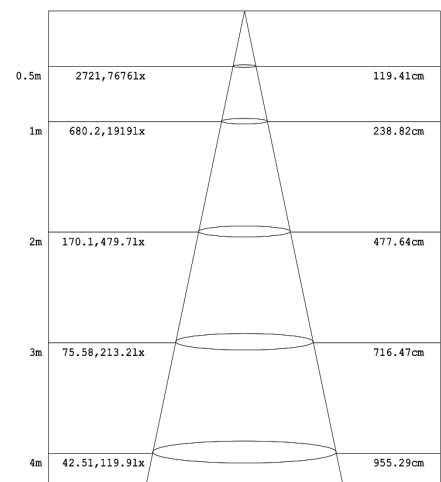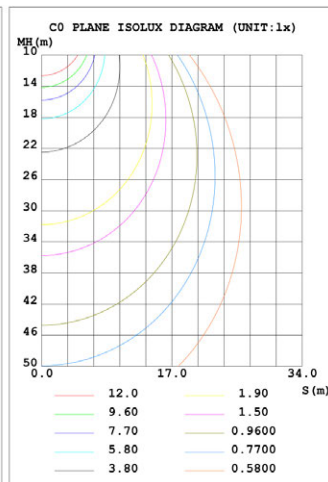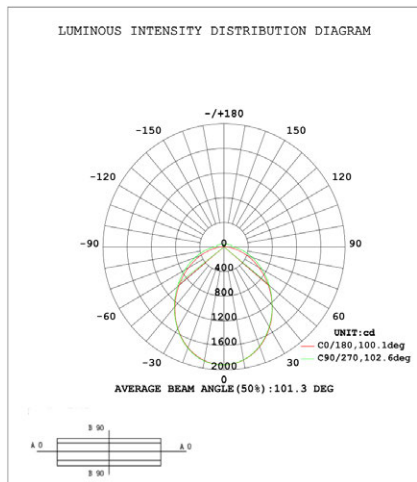

ORDERING EXAMPLE:RP4FT40W-XXK

RP	4FT	40W	XXK
Product	Size	Power	ColorTemp
RP	2 FT (2feet)	40W	40K (4000K)
Led Wrapround Light	4 FT (4feet)	40W(40W)	50K (5000K)