




**DIMENSIONS:**

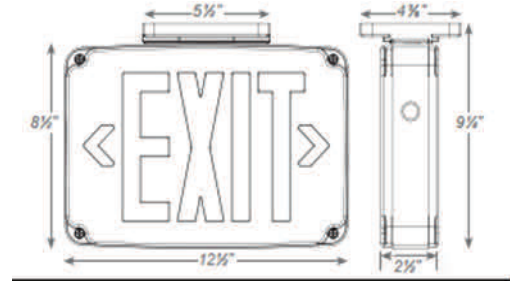

**XT-WP-RG-EM**  
**XT-WP-GG-EM**

**Wet Location Exit Sign**

Durable NEMA 4X Wet Location listed LED exit with emergency back up



**ELECTRICAL SPECIFICATIONS:**

- Dual 120/277 voltage
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery)
- 4.8V long life, maintenance-free, rechargeable NiCd battery
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours

**LIGHTING SPECIFICATIONS:**

- Ultra bright, energy efficient, long life red or green LED

**CERTIFICATIONS:**

- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes

**HOUSING SPECIFICATIONS:**

- 5VA flame retardant, UV-stabilized polycarbonate in white, black or gray finish
- High-impact resistant, UV-stabilized polycarbonate clear lens
- Corrosion-resistant enclosure with engineering grade silicone gasket
- Top and side K/O's provided for conduit feed applications
- EZ snap-out chevron directional indicators
- UL listed for wet locations (-20°C – 50°C)

**MOUNTING:**

- Polycarbonate mounting canopy included for top or end mount
- Universal K/O pattern on back plate for wall mount

**WARRANTY:**

- Five-year warranty on all electronics and housing
- Battery pro rated for five years



JOB NAME: \_\_\_\_\_

DATE: \_\_\_\_\_

TYPE: \_\_\_\_\_

# XT-WP-RG-EM XT-WP-GG-EM

## Wet Location Exit Sign

### ORDER INFORMATION:

MODEL	LETTERS	FACEPLATE	TRIMPLATE	VOLTAGE	BATTERY
XT-WP-RG-EM	Gray	Universal Single/Double	Red	120/277	4.8V Ni-Cad
XT-WP-GG-EM	Gray	Universal Single/Double	Green	120/277	4.8V Ni-Cad

### OPTIONS:

- SDT: Self-diagnostic feature performs monthly, biannual and annual tests to ensure reliable operation and meet electrical and life safety codes
- 2C: Dual circuit option on the AC-only unit enables it to be connected to two different (one acting as a back-up to the other) supplies at the same time
- TP: Tamper-proof hardware helps prevent unauthorized access to the unit
- Custom: Signs available with requested "special" wording

### ELECTRICAL INFORMATION:

MODEL NO	INPUT WATTS (W)	INPUT WATTS (W)	INPUT AMPS (A)	INPUT AMPS (A)
	120V	277V	120V	277V
XT-WP	5.4	5.4	0.045	0.019

