


## PRODUCT DESCRIPTION:

General flood lighting, corridor lighting, security lighting, and roof top lighting. Can also be used as a high bay.

## FEATURES:

- Flexible, modular design
- Fully sealed with an IP rating of 65
- Multiple choices of optical lenses
- Easy installation and maintenance

## DIMENSIONS:

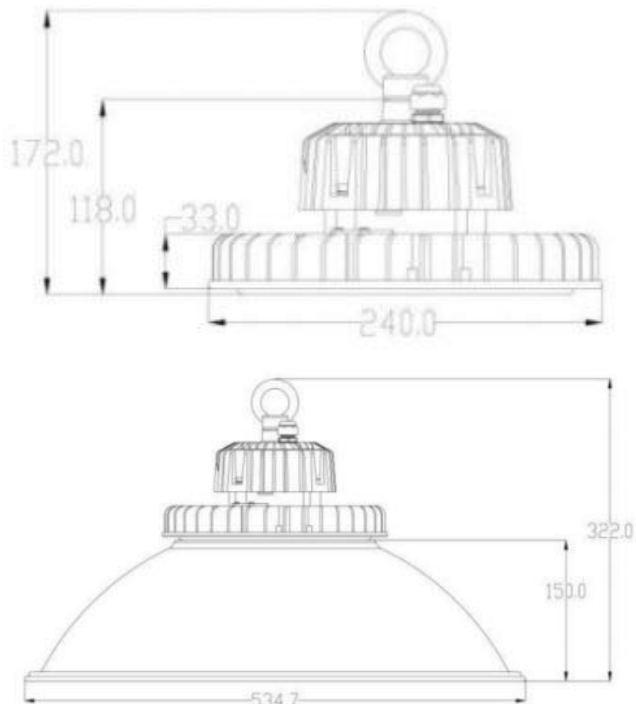

## High Lumen High Bay 120W Spec

LOD-HLHB-120W50K [No Reflector]



**SPECIFICATIONS:**

SPECIFICATION	Details
Model	LOD-HLHB-120W50K [No Reflector]
Input Wattage (W)	120W
Lumens Delivered (LM)	17,474LM
Efficacy (LM/W)	142.44LM/W
CRI	71.6
Lifespan	50,000 hours
Color Temperature	5,000K
Wattage Equivalent	250W (15' – 22')
Dimmable	Yes
IP Rating	IP65
Beam Angle	30 / 60 / 90 / 120
Input Voltage	AC100-277V
Power Factor	0.93
Housing	Aluminum
Lens	Frosted/Clear
Mounting	Hook Mount / Universal Hanging Bracket
Size	9.44" x 6.77"
Weight (LBS)	
Certification	DLC, ETL, FCC, CE RoHS, TUV, ISO9001
Operating Temperature	-40°C to 50°C
Environment	Outdoor
Warranty	5 years limited

**ACCESSORIES:**

