


PROJECT NAME:

CATALOG NUMBER:



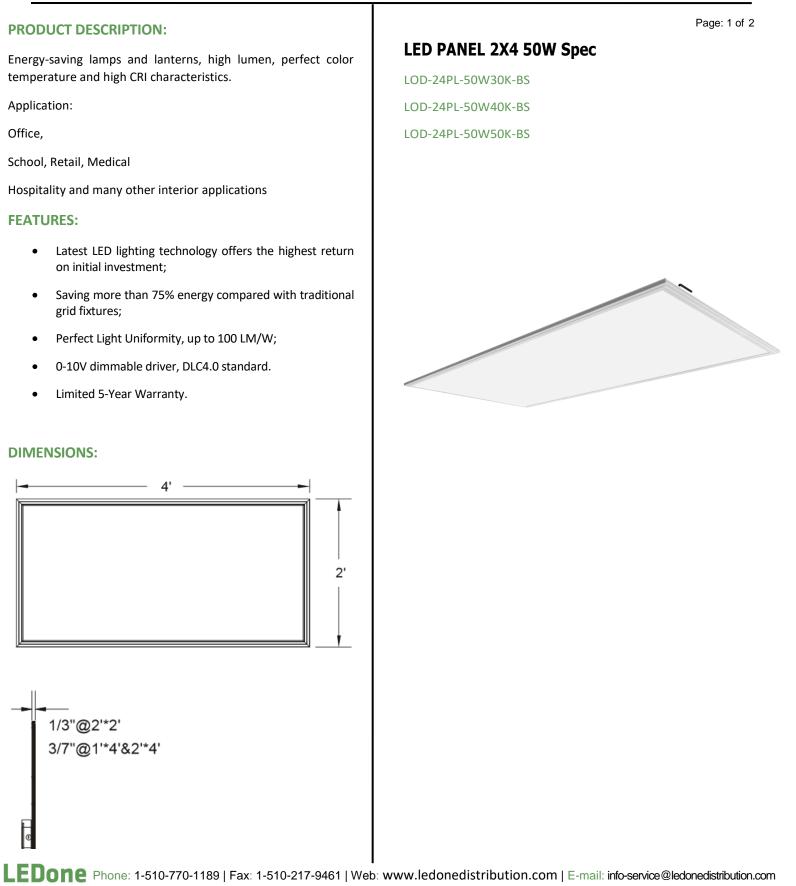

SPECIFICATIONS:

SPECIFICATION	Details	Details	Details
Model	LOD-24PL-50W30K-BS	LOD-24PL-50W40K-BS	LOD-24PL-50W50K-BS
Input Wattage (W)	50W		
Lumens Delivered (LM)	5,449.18LM	5,632.73LM	5,816.28LM
Efficacy (LM/W)	104.151LM/W	107.64LM/W	111.13LM/W
CRI	84	84	84.5
Lifespan	50,000 hours		
Color Temperature	3,000K	4,000K	5,000K
Wattage Equivalent	200W		
Dimmable	0-10V		
Input Voltage	AC100-277V		
Power Factor	0.914	0.91	0.92
Housing	Aluminum Alloy + PC shell		
Lens	Frosted		
Mounting	Recessed ceiling mount		
Weight (LBS)	14.3		
Certification	DLC, UL, FCC, TUV, RoHS, ISO9001		
Operating Temperature	-20-50°C		
Environment	N/A		
Warranty	5 years		

3000K is a special-order request

CONTROLS:

0-10V dimming system

