



RoHS



# eLucent CP CANOPY

ATG's eLucent CP Canopy is a high-performance exterior luminaire designed to provide safe, reliable illumination from low to medium ceiling heights. The robust design is ideal for gas stations, parking garages, stairwells, entryways, and building overhangs. The CP Canopy is tested for wet location use and is IP65 rated. Models are available in 28W, 40W, 60W, and 90W models with color temperatures of 4000K, and 5000K.

## OPTICS

Visual acuity is top-of-class with CRI of 80+. The lens is high-transmittance, prismatic acrylic that offers excellent protection and consistent optical performance. The eLucent CP Canopy is available with standard color temperatures of 4000K and 5000K, ideal for outdoor illumination. 3000K and 3500K models are available for direct factor order. The range of CCT options allows installers to design for a variety of functions.

## OPTIONS

10V dimming with photocell and motion sensor function  
Knockout (KO) Functionality  
Emergency Battery Backup



- **Certified DLC 4.1 Standard**
- **Luminous Efficacy of 113 lm/W or Greater**
- **28W, 40W, 60W, and 90W units**
- **Well-shielded for Outdoor and Wet Location Use**

## ELECTRICAL

Input voltage is a standard 120~277V, with an optional 347~480V driver. Fixture lifespan is rated for 68,000 hours. Luminous efficacy is an excellent 113 Lm/W and the luminaire is available in 28W, 40W, 60W, and 90W units.

## MOUNTING

The luminaire's modular design provides for simple, direct mounting to ceiling surfaces. A knockout is accessible for the installation of sensors.

## CONSTRUCTION

The eLucent CP Canopy LED light is manufactured within precise tolerances from heavy-wall, die-cast aluminum. Heat management is integral to the design and contributes heavily to the unit's excellent functional life. The CP Canopy is rated for use in wet locations and can be operated at temperatures from -40° to 40°C.

## FINISH

The die-cast aluminum housing is shielded with polyester powder paint in an attractive bronze burnish. The coating has been chosen for its toxin-free composition and superior resistance to external wear.




SAMPLE ORDER: CPPG-40-50-G2

SERIES	WATT	VOLTAGE	CCT	DIMMING	OPTIONS
CPPG= LED Canopy	40=40W 60=60W 90=90W	S=120-277V C=347-480VAC	30K=3000K 35K=3500K 40K=4000K 50K=5000K	10=1-10V Dimming N=Non-Dimming	BI= Bi-level OF= On/Off PH=Photocell EM= Emergency Backup Battery


PART NO.	WATTS(W)	INPUT VOLTAGE(VAC)	EFFICACY(LM/W)	LUMENS (LM)	CRI	CCT (K)	PF	THD	L70 (HOURS)	DIMENSIONS (L*W*H) (INCHES)
CPPG-28	28.0	120-277	113	3164	80+	4000* 5000	>.9	<20%	68,000	8.90*8.90*7.20
CPPG-40	39.8	120-277	113	4500	80+	4000* 5000	>.9	<20%	69,000	8.90*8.90*7.20
CPPG-60	60.8	120-277	113	6900	80+	4000* 5000	>.9	<20%	73,000	12.32*12.32*8.90
CPPG-90	90.0	120-277	113	10200	80+	4000* 5000	>.9	<20%	68,000	12.32*12.32*8.90

COLOR	HOUSING	LENS TYPE	CERTIFICATION	WARRANTY
Bronze	Die Cast Aluminum	Prismatic Acrylic	DLC, ETL	5 Years

\*Not all versions of this product may be DLC-qualified. Please inquire with our sales team.

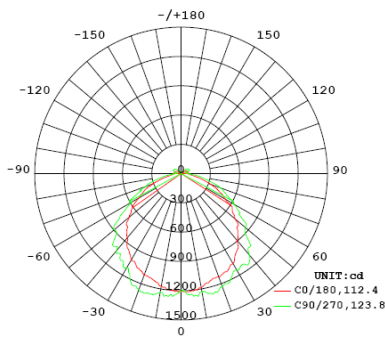

40W

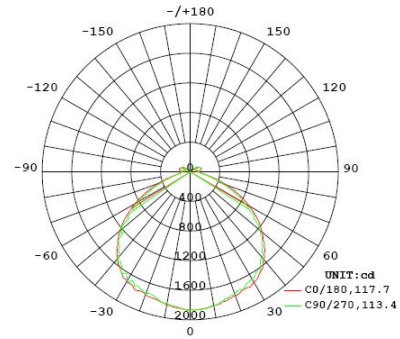

60W  
90W

