

**FEATURE**

- High energy efficiency: save more than 60% energy versus fluorescent lamps
- High uniformity of light
- Beam Angle: 270°
- Materials: available in Nano PC and outer-film glass,
- Glass with Outer Film: Prevent the glass break into pieces
- RoHS Compliant- Mercury Free: eliminate disposal problems
- Ballast compatible: Can be used with existing ballast
- Medium Bi-Pin (G13)
- Easy Installation: plug and play
- NOTE: Check the ballast compatibility list before




Model No.	Size	Material	Power	Lumens	CCT	Voltage
<b>Hybrid Series-Type A+B-Fast and easy installation: hybrid mode-works with or without ballast</b>						
HY-T8-N060-9W-A+B(XX)K	2FT	Nano PC Tube	9W	1125	3500K/4000K/5000K	AC100-277V
HY-T8-N120-13W-A+B(XX)K	4FT		13W	1625		
HY-T8-N120-15W-A+B(XX)K	4FT		15W	1875		
HY-T8-N120-18W-A+B(XX)K	4FT		18W	2250		
HY-T8-F060-9W-A+B(XX)K	2FT	Outer Film Glass Tube	9W	1125	3500K/4000K/5000K	AC100-277V
HY-T8-F120-13W-A+B(XX)K	4FT		13W	1625		
HY-T8-F120-15W-A+B(XX)K	4FT		15W	1875		
HY-T8-F120-18W-A+B(XX)K	4FT		18W	2250		

Model No.	Size	Material	Power	Lumens	CCT	Voltage
<b>Ballast Bypass Series-Type B-Additional cost savings on eliminating ballast replacement costs</b>						
HY-T8-N060-9W-B(XX)K	2FT	Nano PC Tube	9W	1125	3500K/4000K/5000K	AC100-277V
HY-T8-N120-12W-B(XX)K	4FT		12W	1500		
HY-T8-N120-XX	4FT		15W	1875		
HY-T8-N120-18W-A+B(XX)K	4FT		18W	2250		
HY-T8-F060-9W-B(XX)K	2FT	Outer Film Glass Tube	9W	1125	3500K/4000K/5000K	AC100-277V
HY-T8-F120-12W-B(XX)K	4FT		13W	1500		
HY-T8-F120-XX	4FT		15W	1875		
HY-T8-F120-18W-A+B(XX)K	4FT		18W	2250		

Model No.	Size	Material	Power	Lumens	CCT	Voltage
<b>Hybrid Series-Type A+B-Fast and easy installation: hybrid mode-works with or without ballast</b>						
HY-T8-N120-13W-A(XX)K	4FT	Nano PC Tube	13W	1625	3500K/4000K/5000K	AC100-277
HY-T8-N120-15W-A(XX)K	4FT		15W	1875		
HY-T8-N120-18W-A(XX)K	4FT		18W	2250		
HY-T8-F120-13W-A(XX)K	4FT	Outer Film Glass Tube	13W	1625	3500K/4000K/5000K	AC100-277
HY-T8-F120-15W-A(XX)K	4FT		15W	1875		
HY-T8-F120-18W-A(XX)K	4FT		18W	2250		

### INSTALLATION INSTRUCTION

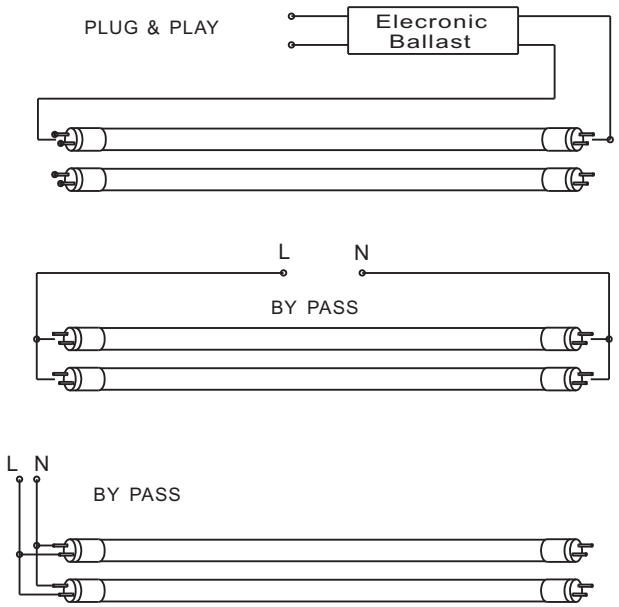

### ORDERING GUIDE

Package Information		
Size	2FT	4FT
Qty/Pack	30 PCS	30 PCS
Package Size	640X235X203mm	1240X235X203mm
	25.2"X9.25"X7.99"	48.8"X9.25"X7.99"
Package Weight	4.6kg/10.14 lbs	8.4kg/18.51 lbs
Package CBM	0.030531	0.059154