




ProLED[®]

Filament LED Series

Product #: _____ Type: _____

Project: _____ Date: _____

Comments: _____ Initials: _____

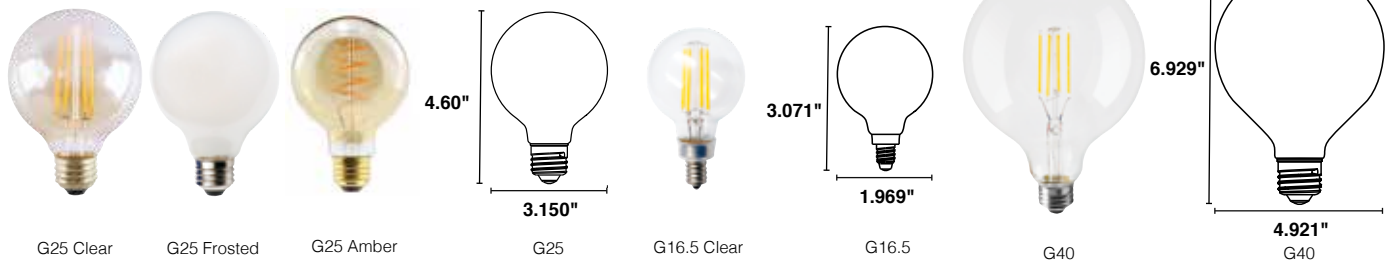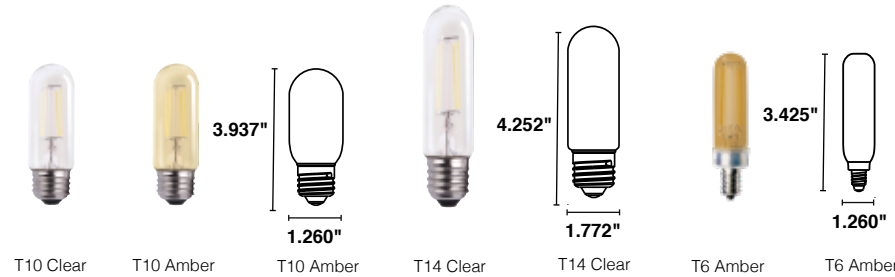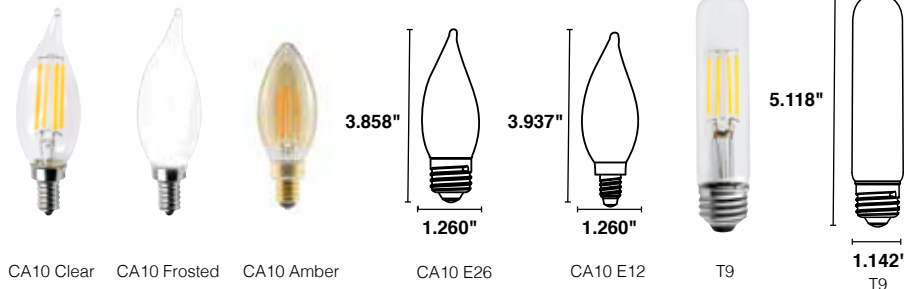

Specifications

CA10

- 25W, 40W, 60W Equivalent options
- Clear 2700K and 3000K options
- Frosted 2700K finish options recreate the look of incandescent
- Amber 2200K creates a nostalgic look and feel
- E26 and E12 base options
- Dimmable to 5%

Tubulars

- T6, T9, T10, and T14 shape options
- 25W and 40W equivalent
- Clear 2700K and Amber 2200K available
- Dimmable to 5%

Globes

- G25 available in 40W, 60W, and 100W equivalent
- Clear and frosted 2700K, Amber 2200K options available
- Curved filament option offers stylish and unique design alternative
- G16.5 available in clear 2700K
- Dimmable to 5%
- E26 and E12 options

Ordering Information



| | Watt | Base | Product # | Product Code | Description | Dimmable | Volts | Color Temp. | CRI | Lumens | Useful Life* | Pkg. Qty. | MOL | Equivalent Wattage |
|--------------|------|------|-----------|-------------------------|------------------|----------|-------|-------------|-----|--------|--------------|-----------|--------|--------------------|
| CA10 | | | | | | | | | | | | | | |
| ⊕ | 2.5 | E12 | 85061 | CA10CL2ANT/827/LED2 | Clear Filament | Yes | 120 | 2700K | 82 | 180 | 15,000 | 10/100 | 4.09" | 25 |
| ⊕ | 2.5 | E12 | 85062 | CA10FR2ANT/827/LED2 | Frosted Filament | Yes | 120 | 2200K | 82 | 160 | 15,000 | 10/100 | 3.78" | 25 |
| ⊕ | 2.5 | E26 | 85063 | CA10CL2ANT/827/E26/LED2 | Clear Filament | Yes | 120 | 2700K | 82 | 180 | 15,000 | 10/100 | 3.72" | 25 |
| ⊕ | 3.8 | E26 | 85064 | CA10CL4ANT/827/E26/LED2 | Clear Filament | Yes | 120 | 2700K | 82 | 300 | 15,000 | 10/100 | 3.78" | 40 |
| ⊕ | 3.8 | E12 | 85065 | CA10CL4ANT/827/LED2 | Clear Filament | Yes | 120 | 2700K | 82 | 300 | 15,000 | 10/100 | 3.72" | 40 |
| ⊕ | 4.5 | E12 | 85066 | CA10CL4ANT/830/LED2 | Clear Filament | Yes | 120 | 3000K | 82 | 350 | 15,000 | 10/100 | 3.78" | 40 |
| ⊕ | 5.5 | E12 | 85067 | CA10CL5ANT/827/LED2 | Clear Filament | Yes | 120 | 2700K | 82 | 500 | 15,000 | 10/100 | 3.72" | 60 |
| ⊕ | 5.5 | E12 | 85068 | CA10CL5ANT/830/LED2 | Clear Filament | Yes | 120 | 3000K | 82 | 500 | 15,000 | 10/100 | 3.78" | 60 |
| ⊕ | 5.5 | E26 | 85069 | CA10CL5ANT/827/E26/LED2 | Clear Filament | Yes | 120 | 2700K | 82 | 500 | 15,000 | 10/100 | 3.72" | 60 |
| ⊕ | 4.5 | E12 | 85077 | CA10AMB4ANT/822/LED2 | Amber Filament | Yes | 120 | 2200K | 82 | 300 | 15,000 | 10/100 | 4.13" | 40 |
| ⊕ | 3.8 | E12 | 85082 | CA10FR4ANT/827/LED2 | Frosted Filament | Yes | 120 | 2700K | 82 | 300 | 15,000 | 10/100 | 3.78" | 40 |
| T9 | | | | | | | | | | | | | | |
| ⊕ | 4.5 | E12 | 85084 | T9CL4ANT/830/LED2 | Clear Filament | Yes | 120 | 3000K | 82 | 350 | 15,000 | 10/100 | 3.937" | 25 |
| ⊕ | 5.5 | E12 | 85085 | T9CL4ANT/830/LED2 | Clear Filament | Yes | 120 | 3000K | 82 | 500 | 15,000 | 10/100 | 3.937" | 40 |
| T10 | | | | | | | | | | | | | | |
| ⊕ | 4.5 | E26 | 85074 | T10CL4ANT/827/LED2 | Clear Filament | Yes | 120 | 2700K | 82 | 350 | 15,000 | 10/100 | 3.937" | 25 |
| ⊕ | 4.5 | E26 | 85075 | T10AMB4ANT/822/LED2 | Amber Filament | Yes | 120 | 2200K | 82 | 300 | 15,000 | 10/100 | 3.937" | 40 |
| T14 | | | | | | | | | | | | | | |
| ⊕ | 4.5 | E26 | 85073 | T14CL4ANT/827/LED2 | Clear Filament | Yes | 120 | 2700K | 82 | 350 | 15,000 | 10/100 | 3.46" | 25 |
| T6 | | | | | | | | | | | | | | |
| ⊕ | 2.5 | E26 | 85076 | T6AMB2ANT/822/LED2 | Amber Filament | Yes | 120 | 2200K | 82 | 160 | 15,000 | 10/100 | 3.46" | 25 |
| ⊕ | 2.5 | E12 | 85083 | T6CL2ANT/830/LED2 | Clear Filament | Yes | 120 | 3000K | 82 | 180 | 15,000 | 10/100 | 3.46" | 25 |
| G16.5 | | | | | | | | | | | | | | |
| ⊕ | 2.5 | E12 | 85086 | G16.5CL2ANT/830/LED2 | Clear Filament | Yes | 120 | 3000K | 82 | 180 | 15,000 | 10/60 | 4.60" | 25 |
| ⊕ | 4.5 | E12 | 85087 | G16.5CL4ANT/830/LED2 | Clear Filament | Yes | 120 | 3000K | 82 | 500 | 15,000 | 10/60 | 4.60" | 40 |
| G40 | | | | | | | | | | | | | | |
| ⊕ | 7.5 | E12 | 85088 | G40CL7ANT/830/LED2 | Clear Filament | Yes | 120 | 3000K | 82 | 500 | 15,000 | 10/60 | 4.60" | 100 |
| G25 | | | | | | | | | | | | | | |
| ⊕ | 5.5 | E26 | 85047 | G25CL5ANT/827/LED2 | Clear Filament | Yes | 120 | 2700K | 82 | 500 | 15,000 | 10/60 | 4.60" | 60 |
| ⊕ | 5.5 | E26 | 85048 | G25FR5ANT/827/LED2 | Frosted Filament | Yes | 120 | 2700K | 82 | 500 | 15,000 | 10/60 | 4.60" | 60 |
| ⊕ | 5.5 | E26 | 85049 | G25CL5ANT/830/LED2 | Clear Filament | Yes | 120 | 3000K | 82 | 500 | 15,000 | 10/60 | 4.60" | 60 |
| ⊕ | 8 | E26 | 85172 | G25CL8ANT/827/LED2 | Clear Filament | Yes | 120 | 2700K | 82 | 800 | 15,000 | 10/604 | 4.52" | 60 |
| ⊕ | 6.5 | E26 | 85079 | G25AMB6ANT/820/CF/LED2 | Amber Filament | Yes | 120 | 2000K | 82 | 250 | 15,000 | 10/60 | 4.60" | 40 |
| G16.5 | | | | | | | | | | | | | | |
| ⊕ | 3.5 | E12 | 85070 | G16.5CL2ANT/827/LED2 | Clear Filament | Yes | 120 | 2700K | 82 | 250 | 15,000 | 10/100 | 3.071" | 40 |
| ⊕ | 4.5 | E12 | 85071 | G16.5CL4ANT/827/LED2 | Clear Filament | Yes | 120 | 2700K | 82 | 350 | 15,000 | 10/100 | 3.071" | 40 |

⊕ NEW ITEM

* Useful Life is defined as the point in time at which the lamp will maintain at least 70% of its initial lumens. The lamp will continue to burn past this point, but at decreased light levels. Represents lamps that are ENERGY STAR[®] certified. Warranty Commercial/Industrial: This product is warranted for 3 years from the date purchase. Not for use in enclosed fixtures. May not be compatible with all dimmable systems, dimming performance may vary by system, please check the website www.halcolighting.com for up-to-date dimmer compatibility information. Use on incompatible systems may shorten lamp life.