

PORTOR INDUSTRY brand



4" Square LED Slim Recessed Downlight with Multiple CCT

Date:

Project Name:

Notes:

Туре:

DESCRIPTION

No can or housing needed! Install directly into ceilings with 2" clearance. Portor's slim profile residential downlights are taking the market by storm! Available in 4" and featuring color tunable technology that lets the user choose between 3000K, 4000K, or 5000K.

Ideal for soffits, drop ceilings, closets, attics, hallways, bathrooms, kitchens, basements, entry ways, porches (covered ceiling only), garages, stairwells, corridors, nursing/ retirement homes, condos, elevators, apartments, and any other small areas with limited space.

TUNABLE 3-1 CCT SELECTOR



Easily flip the switch for desired CCT. It's that simple!

FEATURES

- Edge-lit technology, with no glare or dark spots
- Instant-on
- Ultra slim design, 1" thickness
- Integrated LED fixtures
- · LED technology fits anywhere you need general light source
- IC rated for direct contact with insulation
- Perfect solution where joists or duct work would normally prevent recessed installation
- Damp location rated for soffit applications
- Install J-Box in ceiling beam, and insert light right into drywall opening

DIMMING

Triac dimmable down to 100%-10%. Compatible with most major brands of dimmers.

LISTING

ETL Listed, FCC, RoHS, CE & Energy Star Listed

TECHNICAL SPECIFICATION

I LOTINICAL OF LOIFICATION					
WATTAGE	9W				
LUMENS	650 lumens (@ 5000K)				
EFFICACY	72 lm/W				
VOLTAGE	120V				
POWER FREQUENCY	50/60 Hz				
CCT	<mark>3000К 4000К 5000К</mark>				
CRI	90				
BEAM ANGLE	120°				
RATING	Suitable for damp locations				
DIMMABLE	Triac dimming				
POWER FACTOR	>0.9				
WARRANTY	5 year limited				



MODEL NUMBER(S)							
MODEL#	WATTS	LUMENS	LM/WATT	CCT	CRI	VOLTAGE	
PT-DLS-S-4I-9W-3CCT	9W	650 (at 5000K)	72	3000K/4000K/5000K	90	120V	







PT-DLS-S-4I-9W-3CCT


4" Square LED Slim Recessed Downlight with Multiple CCT

Project Name:	Notes:	Date:	Туре:
	Easily flip the switch		

for desired CCT

Sealing gasket standard

DIMENSION

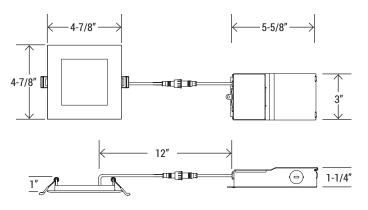

(Cut-out: 4-1/4")

MOUNTING OPTIONS



UNI-DLS 4"/6" Universal Slim LED Housing for New Construction



RP-DLS-4I 4" Slim LED Rough plate

PHOTOMETRY

