



## KT-LED11T8-36G-8CSJ-DX2 T8 LED LAMP

#### DESCRIPTION

11W T8 LED Lamp | 3000/3500/4000/5000/6500K | > 80 CRI | High-Efficiency | Single- or Double-ended Line Voltage Wiring

LAMP TYPE: Linear

BULB TYPE: T8 LED

BASE TYPE: G13 (Medium Bi-Pin)

WATTAGE: 11W

**COLOR TEMPERATURE:** 3000/3500/4000/5000/6500K

COLOR RENDERING INDEX (CRI): >80

WARRANTY: 5 Years

#### **PRODUCT FEATURES**

- Replacement for conventional fluorescent lamp
- Single- or double-ended line voltage wiring
- Keystone Color Select technology (3000/3500/4000/5000/6500K)
- Instant startup
- Frosted glass lens eliminates pixelation
- Approximately 60% more energy-efficient than standard F32T8 lamps
- Environmentally friendly: No mercury used
- 132+ Lumens per Watt
- Operating temperature: -20ºC/-4ºF to 45ºC/113ºF
- Storage temperature: -30°C/-22°F to 60°C/140°F
- Operating humidity: 10-80%
- Integral driver (isolated) eliminates the need for external driver or ballast

#### COLOR SELECT (CCT) ADJUSTMENT

**ELECTRICAL CHARACTERISTICS** 

- This fixture is equipped with field-adjustable Keystone Color Select technology.
- Adjustable CCT (3000/3500/4000/5000/6500K).
- Adjust dip switch to desired setting (preset to 4000K CCT).



Input Voltage	Power Consumption	CCT*	Lumen Output	Efficacy	CRI	Beam Angle	Visible Light Area	Power Factor	THD	Input Current	Lifetime
120–277 Vac 60Hz	11W	3,000K	1,450	132 lm/W	>80	240º	325º	>0.9	>20%	91mA @120V 40mA @277V	50,000 hrs
		3,500K	1,475	134 lm/W							
		4,000K	1,500	136 lm/W							
		5,000K	1,500	136 lm/W							
		6,500K	1,475	134 lm/W							

\* Preset to 4000K CCT; Color Uniformity: CCT (Correlated Color Temperature) range as per guidelines outlined in ANSI C78.377-2017





- Not compatible with Keystone AC emergency drivers: KT-EMRG-LED-5-500-AC, KT-EMRG-LED-5-500-AC/DF, KT-EMRG-LED-12-1200-AC, or KT-EMRG-LED-12-1200-AC /DF
- Not rated for use in Vapor Tight style fixtures
- Meets FCC Part 15, Class B
- 50,000+ hour lifetime
- DLC Listed
- UL Classified
- Lamp is dimmable when used with an appropriate dimming accessory (purchased separately). Contact Keystone for more details to find out what is best for the intended application.







Page 2 of 3

### KT-LED11T8-36G-8CSJ-DX2 T8 LED LAMP


#### WIRING DIAGRAMS

WARNING: NOT COMPATIBLE WITH KEYSTONE AC EMERGENCY BACKUPS


#### SINGLE-ENDED WIRING DIAGRAM

1. Cut all existing connections to ballast as shown below and remove ballast. See Figure A for typical ballast configurations. Note: Single-ended wiring requires non-shunted lampholders.

#### FIGURE A Typical Ballast Wiring Configurations

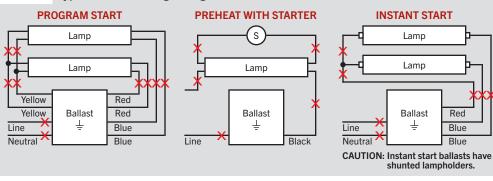

# TYPICAL NON-SHUNTED




Connect wires directly to these terminals

#### CAUTION: FOR SINGLE-ENDED WIRING USE ONLY NON-SHUNTED LAMPHOLDERS.

For Single-ended wiring, do not install product in a fixture with shunted lampholders (found in all fixtures using instant start ballasts). If the current lampholders are shunted, remove them and replace them with non-shunted lampholders. Make new connections directly to terminals as indicated above. Keystone can provide any style replacement lampholders. Call us at 800-464-2680.


#### 2. Rewire fixture as shown below.

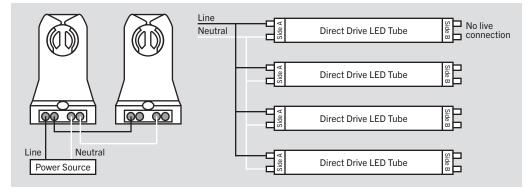

#### DOUBLE-ENDED WIRING DIAGRAM

- 1. Cut all existing connections to ballast as shown below and remove ballast. See Figure A above for typical ballast configurations.
- 2. Re-wire fixture as shown below. For double-ended wiring, use either shunted or nonshunted lampholders.

#### NOTE: There should not be any exposed wires at the end of installation.

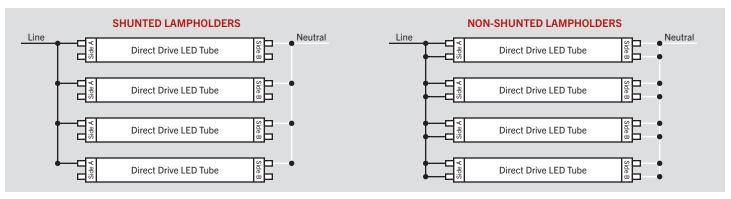








Page 3 of 3


# KT-LED11T8-36G-8CSJ-DX2 T8 LED LAMP

#### **PHOTOMETRIC CHARACTERISTICS**

#### SPECTRAL DISTRIBUTION

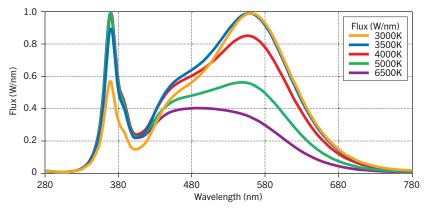

#### **PHYSICAL CHARACTERISTICS**

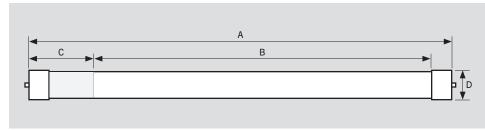

#### LAMP DIMENSIONS

A (Body Length)	35.20"			
B (Illuminated Length)	32.00"			
C (End Cap/Sticker Area)	2.25"			
D (Diameter)	1.10"			

#### NOMINAL LENGTH: 36"

BASE TYPE: G13 (Medium Bi-Pin)

# ORDERING INFORMATIONORDER CODECARTON QUANTITYUPCEASY CODEKT-LED11T8-36G-8CSJ-DX225 pcs843654141435CHY-48CATALOG NUMBER BREAKDOWNKT-LED11T8-36G-8CSJ-DX2

