





KT-LED7T8-24G-8CSJ-DX2 T8 LED LAMP

DESCRIPTION

7W T8 LED Lamp | 3000/3500/4000/5000/6500K | > 80 CRI | High-Efficiency | Single- or Double-ended Line Voltage Wiring

LAMP TYPE: Linear

BULB TYPE: T8 LED

BASE TYPE: G13 (Medium Bi-Pin)

WATTAGE: 7W

COLOR TEMPERATURE: 3000/3500/4000/5000/6500K

COLOR RENDERING INDEX (CRI): >80

WARRANTY: 5 Years

PRODUCT FEATURES

- Replacement for conventional fluorescent lamp
- Single- or double-ended line voltage wiring
- Keystone Color Select technology (3000/3500/4000/5000/6500K)
- Instant startup
- Frosted glass lens eliminates pixelation
- Approximately 60% more energy-efficient than standard F32T8 lamps
- Environmentally friendly: No mercury used
- 135+ Lumens per Watt
- Operating temperature: -20°C/-4°F to 45°C/113°F
- Storage temperature: -30°C/-22°F to 60°C/140°F
- Operating humidity: 10-80%
- Integral driver (isolated) eliminates the need for external driver or ballast

COLOR SELECT (CCT) ADJUSTMENT

ELECTRICAL CHARACTERISTICS

- This fixture is equipped with field-adjustable Keystone Color Select technology.
- Adjustable CCT (3000/3500/4000/5000/6500K).
- Adjust dip switch to desired setting (preset to 4000K CCT).



Input Voltage	Power Consumption	CCT*	Lumen Output	Efficacy	CRI	Beam Angle	Visible Light Area	Power Factor	THD	Input Current	Lifetime
120–277 Vac 60Hz	7W	3,000K	950	135 lm/W	>80	240º	325⁰	>0.9	>20%	58mA @120V 25mA @277V	50,000 hrs
		3,500K	975	139 lm/W							
		4,000K	1,000	142 lm/W							
		5,000K	1,000	142 lm/W							
		6,500K	975	139 lm/W							

* Preset to 4000K CCT; Color Uniformity: CCT (Correlated Color Temperature) range as per guidelines outlined in ANSI C78.377-2017





- Not compatible with Keystone AC emergency drivers: KT-EMRG-LED-5-500-AC, KT-EMRG-LED-5-500-AC/DF, KT-EMRG-LED-12-1200-AC, or KT-EMRG-LED-12-1200-AC /DF
- Not rated for use in Vapor Tight style fixtures
- Meets FCC Part 15, Class B
- 50,000+ hour lifetime
- DLC Listed
- UL Classified
- Lamp is dimmable when used with an appropriate dimming accessory (purchased separately). Contact Keystone for more details to find out what is best for the intended application.







Page 2 of 3

KT-LED7T8-24G-8CSJ-DX2 T8 LED LAMP


WIRING DIAGRAMS

WARNING: NOT COMPATIBLE WITH KEYSTONE AC EMERGENCY BACKUPS

SINGLE-ENDED WIRING DIAGRAM

1. Cut all existing connections to ballast as shown below and remove ballast. See Figure A for typical ballast configurations. Note: Single-ended wiring requires non-shunted lampholders.

FIGURE A Typical Ballast Wiring Configurations

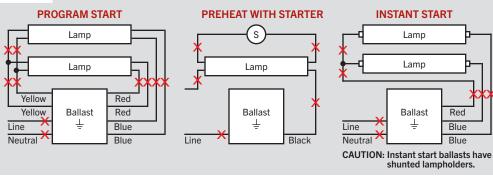

TYPICAL NON-SHUNTED LAMPHOLDER




Connect wires directly to these terminals

CAUTION: FOR SINGLE-ENDED WIRING USE ONLY NON-SHUNTED LAMPHOLDERS.

For Single-ended wiring, do not install product in a fixture with shunted lampholders (found in all fixtures using instant start ballasts). If the current lampholders are shunted, remove them and replace them with non-shunted lampholders. Make new connections directly to terminals as indicated above. Keystone can provide any style replacement lampholders. Call us at 800-464-2680.


2. Rewire fixture as shown below.

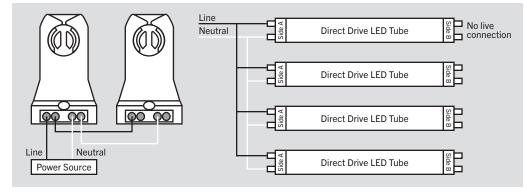

DOUBLE-ENDED WIRING DIAGRAM

- 1. Cut all existing connections to ballast as shown below and remove ballast. See Figure A above for typical ballast configurations.
- 2. Re-wire fixture as shown below. For double-ended wiring, use either shunted or nonshunted lampholders.

NOTE: There should not be any exposed wires at the end of installation.

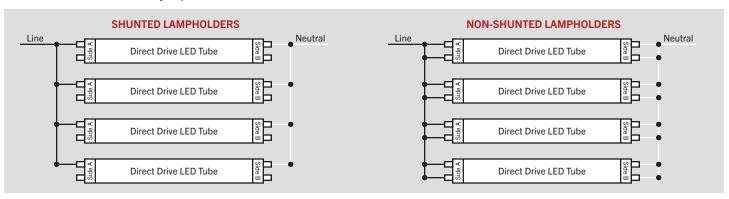








Page 3 of 3


KT-LED7T8-24G-8CSJ-DX2 T8 LED LAMP

PHOTOMETRIC CHARACTERISTICS

SPECTRAL DISTRIBUTION

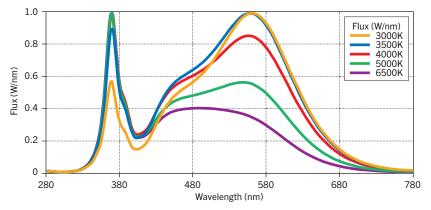

PHYSICAL CHARACTERISTICS

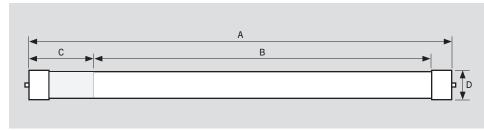

LAMP DIMENSIONS

A (Body Length)	23.20"		
B (Illuminated Length)	20.20"		
C (End Cap/Sticker Area)	2.25"		
D (Diameter)	1.10"		

NOMINAL LENGTH: 24"

BASE TYPE: G13 (Medium Bi-Pin)

ORDERING INFORMATION

ORDEF	CODE	CARTON QUANTITY	UPC	EASY CODE
KT-LED7T8-2	4G-8CSJ-DX2	25 pcs	843654141428	JJV-28

CATALOG NUMBER BREAKDOWN

KT-LED7T8-24G-8CSJ-DX2

1 2 3 4 5 6 / 8	9 10		
1 Keystone Technologies			
2 LED Lamp			
3 Wattage			
4 Lamp Type			
5 Nominal Length (Inches)			
6 Glass Construction			
7 CRI			
8 Color Select			
9 Color Select Designation	9 Color Select Designation		
10 Single- or Double-Ended Line Voltage Wiring	J 3000/3500/4000/5000/6500K		