

CMC SERIES COMMERCIAL INDOOR LIGHTING

CMC9-MCTP-D-WH
CMC9-MCTP-D-BK


MCTP Multi Color Temperature & Multi Power/Wattage (Selectable)

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

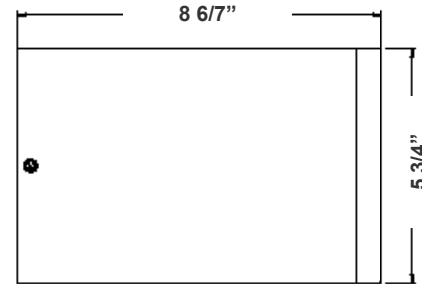

8 6/7"(W) X 5 3/4" (H)

9" Cylinder, Pendant & Ceiling Cylinder Light, Aluminum Cylinder, Clear Glass Lens

Features

- Multi CCT: Selectable Multi-CCT & Power Switches on the back of the fixture
- 5-Year Warranty
- Aluminum Base and Glass Lens

Technical Specifications

Electrical:

- Voltage: 120-277V
- Power Factor: >0.90
- THD: <20%
- Wattage: 60W/70W/80W
- Efficacy: 80 LPW

Mechanical:

- Aluminum Housing & Glass Lens
- Frosted Glass Lens Accessory Available
- EM Backup Option with the Extension Cylinder
- Swivel Rod Kit for Suspended Mounting Available
- Black or White Trim Accessories Available
- Ambient Operating Temperature: -13°F to 113°F
- IP Rating: IP40 suitable for damp locations
- 5-Year Warranty

Lighting:

- Multi CCT: Selectable Multi-CCT & Power Switches on the back of the fixture
- Dimming: 0-10V Dimming
- Total Lumens: 6400LM Max.
- Color Temperatures: 3000K/4000K/5000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 60°
- Rated life: 50,000 hrs

Applications:

- 9" Cylinder, Pendant & Ceiling Cylinder Light, Aluminum Cylinder, Clear Glass Lens

Other Models:

- 15W | 1125LM | CMC4-MCTP-DD-WH
- 35W | 2625LM | CMC6-MCTP-D-WH
- 15W | 1125LM | CMC4-MCTP-DD-BK
- 35W | 2625LM | CMC6-MCTP-D-BK



Other Views:

BLACK/BLACK:



Side View



Lens View



Back View

BLACK/WHITE:



Side View



Lens View



Back View

WHITE/WHITE:



Side View



Lens View




Back View

WHITE/BLACK:



Side View



Lens View



Back View

Performance Table: CMC9-MCTP-D

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	LPW
CMC9-MCTP-D-WH	60W	120-277V	4800LM	3000K	80
CMC9-MCTP-D-BK	70W		5600LM	4000K	
	80W		6400LM	5000K	

Sample Ordering

Model Color Temp. Dimming Housing

CMC9 - MCTP - D -

Accessories:

WH = White
BK = Black

Blank = No Option For Accessories

CMC9-EC-BK = Decorative Extension Cylinder Black

CMC9-EC-WH = Decorative Extension Cylinder White

CMC9-FL = Frosted Glass lens

CMC9-CL = Clear Glass Lens

CMC9-REFL-BK = Inside-Black Reflector

CMC9-REFL-WH = Inside-White Reflector

CMC-SRK-218-5C-WH = Universal Swivel W/ Rod Kit, 18 Or 36 Inches, 5-Wire, White

CMC-SRK-218-5C-BK = Universal Swivel W/ Rod Kit, 18 Or 36 Inches, 5-Wire, Black

CMC-SRK-224-5C-WH = Universal Swivel W/ Rod Kit, 24 Or 48 Inches, 5-Wire, White

CMC-SRK-224-5C-BK = Universal Swivel W/ Rod Kit, 24 Or 48 Inches, 5-Wire, Black

Factory-Installed Option:

Blank = No Option For Accessories

OPT-EM-CMC9-BK = Emergency Backup with Extension Cylinder Black

OPT-EM-CMC9-WH = Emergency Backup with Extension Cylinder White

ACCESSORIES:



CMC9-EC-BK



CMC9-EC-WH



CMC9-REFL-BK



CMC9-REFL-WH

FACTORY-INSTALLED OPTION:



OPT-EM-CMC9-BK

OPT-EM-CMC9-WH

