EZXTEU LED Exit Sign

LED LIGHTING WHOLESALE INC.

Project:	
Type:	
Catalog #:	

CUSTOM SIGNAGE AVAILABLE

STANDARD

UL LISTED · ALL LED · DAMP · MOUNTING CANOPY

OPTIONAL

2C · SELF DIAGNOSTIC · ASSEMBLED IN UNITED STATES · cULus LISTED

ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LED.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- EZ-snap mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.

HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- EZ snap-out chevron directional indicators.
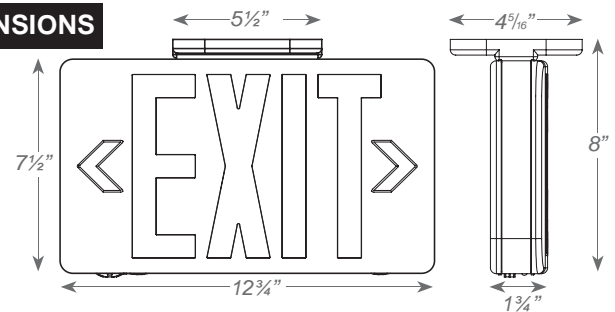- Compact, low-profile design.

OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.
- 2C: Dual circuit option on the AC-only unit enables it to be connected to two different (one acting as a back-up to the other) supplies at the same time.
- Custom: Signs available with requested 'special' wording.
- USA: Substantial transformation assembly in the U.S. complies with "Assembled in the USA" under the Buy American Act.
- cULus: Units tested to meet requirements of CAN/CSA-c22.2 No. 141-02 standard for unit equipment.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery pro rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).

DIMENSIONS

5½" · 4⁵/₁₆" · 7½" · 8" · 12¾" · 1¾"

ORDERING INFORMATION

Sample Part Number: EZXTEU-2-R-W-EM

	MODEL	No. of FACES		LETTER COLOR		HOUSING COLOR		BATTERY		OPTIONS	
Special voltage & SALIDA face plate options available. Check with your Best Lighting Representative.	EZXTEU	1	Single Face	R	Red	W	White	Blank	AC Only	SDT	Self-diagnostics [1]
		2	Universal Single/ Double Face	G	Green	B	Black	EM	Battery Backup	2C	Dual circuit operation [2]
[1] Available only with EM units.										Custom	Custom wording
[2] Available only with AC units										USA	Assembled in USA
										cULus	cULus Listed

EZXTEU LED Exit Sign

Project:	
Type:	
Catalog #:	

ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
EZXTEU-RED/GREEN/EM/2C/SDT	3.8	3.8	0.034	0.020