

SCR SERIES Commercial Lighting

SCR-48D-MCTP5-D

LED ARCHITECTURAL 48in ROUND SUSPENDED LIGHT

MCTP Multi Color Temperature & Multi Power/Wattage (Selectable)

WESTGATE

THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: _____


Project Name: _____

Note: _____

Type: _____



A modern decorative Euro-design suspended light suitable for conference tables, creative offices and department stores.

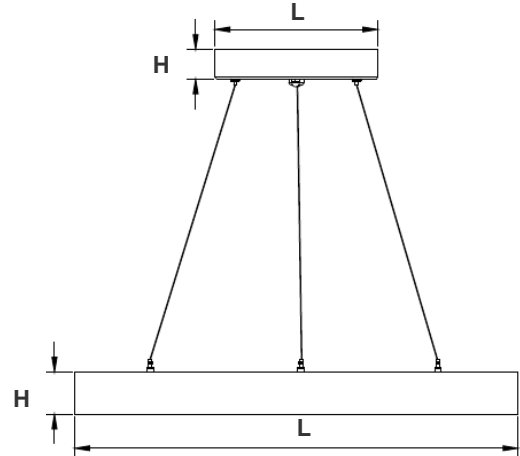

Canopy Dimension: 8 3/5"(L) x 2 1/2"(H)

Fixture Dimension: 48"(L) x 2 1/4"(H)

Features

- LED Superior Architectural Lights
- Aluminum Housing With Sandy White Finish
- MCTP: Multi Color Temperature and Power (Selectable, the switches are inside the Canopy)
- 5-Year Warranty

Technical Specifications

Electrical:

- Voltage: 120-277V AC 50/60Hz
- Wattage: 120W/140W/160W/180W/200W
- Power Factor: >0.98
- LPW: 100 LM/W
- Total Harmonic Distortion: ≤19 %

Mechanical:

- Aluminum Housing With Sandy White Finish
- Three 10FT Adjustable Suspension Cables
- Opal Polycarbonate Lens - Direct Down Light,
- Operating Temperature: -46°F to 104°F
- IP Rating: IP20
- 5-Year Warranty

Lighting:

- Dimmable: 0~10V Dimming
- Total Lumens: 20000LM
- Color Temperatures: 2700K/3000K/3500K/4000K/5000K
- MCTP: Multi Color Temperature and Power (Selectable, the switches are inside the Canopy)
- Color Rendering Index: CRI ≥ 80
- 50,000 Hours Rated Life
- Beam Angle: 114°(H) x 114°(V)

Applications:

- Ideal for offices, hotels, corridors, saloons, libraries, meeting rooms, conference halls, and the best solution for modern lighting solutions
- It can be used in any indoor applications





Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com




WG-04102022

Photometrics: SCR-48D-MCTP5-D



BUD Rating: B2-U3-G1

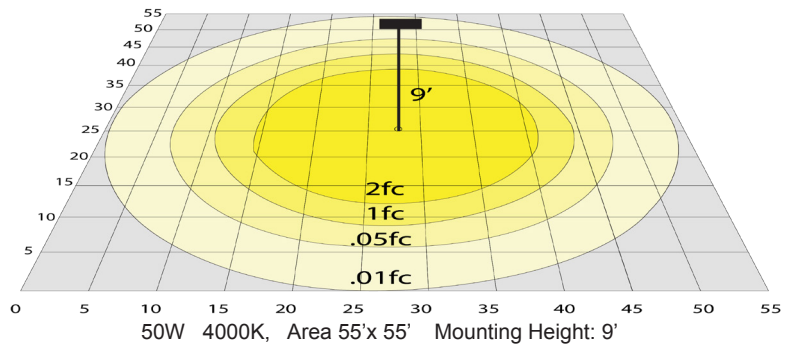


Other Views:

Direct:



Side View

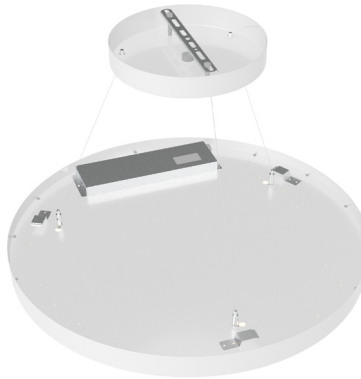

Top View



Bottom View

Performance Table: SCR-48D-MCTP5-D

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
SCR-48D-MCTP5-D	120W	120~277V	12000	2700K	B2-U3-G1	100
	140W		14000	3000K		
	160W		16000	3500K		
	180W		18000	4000K		
	200W		20000	5000K		

Sample Ordering

Model	Size	Color Temp.	Dimming
SCR	48D	MCTP5	D

Accessories:

Blank = No Option For Accessories

SCR-3648D-ULK = Uplight Kit For 36in & 48in SCR Fixtures

SCR-48D-MCTP-SMB = Surface Mounting Bracket For SCR-48D-MCTP-D

Factory-Installed Options:

Blank = No Option For Accessories



OPT-EM-SCR = EMERGENCY BACKUP INTERNAL BATTERY

OPT-SEN-2MDR-36 = PROGRAMMABLE MICROWAVE BI-LEVEL

OPT-SEN-NLS-SCR = WG NETWORK SENSOR

OPT-SEN-KEILTON-SCR = KEILTON NETWORK SENSOR

ACCESSORIES:



SCR-3648D-ULK

19.69"(D) x 1.1"(H)

FACTORY-INSTALLED OPTIONS:



OPT-SEN-SCR



OPT-EM-SCR

